




NUH ÇİMENTO SANAYİ A.Ş. PORT FACILITY DANGEROUS GOODS HANDLING GUIDE

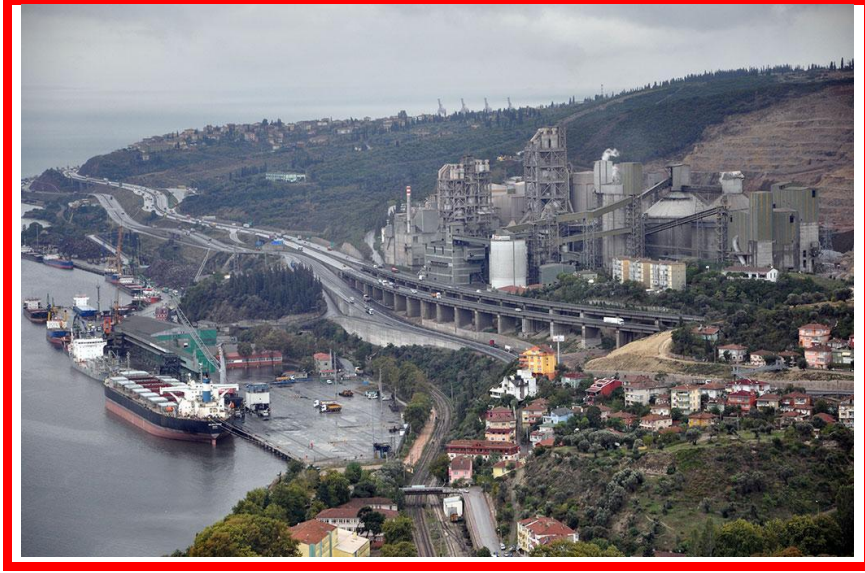

PREPARATION DATE:20.09.2022
(Refer to the Revised Revised Page)

NAME SURNAME: Güner DÜVEN

SIGNATURE

SEAL

nuh çimento san. a.ş.

REVISION PAGE


Ser. Nu	Revision Nu	Revision Contents	Revision Date	Revision Author	
				Name Surname	Signature
1	1	Revision on General information of the port facility	05.07.2024	Gizem EREN	
2	2	Change of name and surname of Dangerous goods safety consultant	22.10.2025	Elif AYDOĞAN	
3	3	Change of name and surname of the facility manager	22.10.2025	Elif AYDOĞAN	
4	4	Packaged products have been removed	22.10.2025	Elif AYDOĞAN	
5	5	Pilotage company name changed	22.10.2025	Elif AYDOĞAN	
6	6	Berth information has been revised.	22.10.2025	Elif AYDOĞAN	
7	7	Dangerous goods safety advisor signatures changed	22.10.2025	Elif AYDOĞAN	
8	8	Overseas Directorate information has been revised	22.10.2025	Elif AYDOĞAN	
9	9	Emergency numbers have been revised	22.10.2025	Elif AYDOĞAN	
10	10	The Checklist for the Safe Handling Operation of Packaged Dangerous Goods has been removed.	22.10.2025	Elif AYDOĞAN	
11	11	The information of the Foreign Sales Directorate has been removed.	22.10.2025	Elif AYDOĞAN	
12	12	The Attachments have been updated.	22.10.2025	Elif AYDOĞAN	
13	13	Hazardous material label information has been updated.	22.10.2025	Elif AYDOĞAN	
14	14	The information in the table of contents has been updated	22.10.2025	Elif AYDOĞAN	
15	15	The information in some sections has been revised	03/12/2025	Elif AYDOĞAN	
16	16	Change of name and surname of Dangerous goods safety consultant	01.06.2026	Serkan Ekici	

TABLE OF CONTENTS

1	ENTRY.....	1-1
1.1	General information of the port facility	1-2
1.2	Loading/unloading, handling and storage procedures for dangerous cargoes handled and temporarily stored at the port facility	1-5
1.2.1	General.....	1-5
1.3	Operational procedure of safe handling of bulk solid dangerous cargoes:.....	1-6
1.3.1	Application.....	1-6
1.3.2	Requirements.....	1-6
1.3.3	Documentation.....	1-7
1.3.4	Responsibility for compliance	1-7
1.3.5	Emission of harmful dusts.....	1-7
1.3.6	Emission of dangerous vapor/oxygen deficiency.....	1-8
1.3.7	Emission of explosive dusts	1-8
1.3.8	Spontaneously combustible substances and substances that react with water	1-8
1.3.9	Oxidizing substances	1-8
1.3.10	Incompatible materials.....	1-8
1.3.11	Cargo which can be handled at our facility in accordance with IMSBC CODE.....	1-8
2	RESPONSIBILITIES.....	2-1
2.1	General responsibilities of all sides.....	2-1
2.2	Responsibilities of the cargo authority	2-1
2.3	Responsibilities of the carrier	2-1
2.4	Responsibilities of the port facility operator	2-1
2.5	Responsibilities of the ship's contact person.....	2-2
2.6	Training Responsibilities	2-3
2.7	Loading Safety Responsibilities	2-3
3	POLICIES/APPLIED RULES AND MEASURES TO BE FOLLOWED BY PORT FACILITY. 3-1	
3.1	Loading safety.....	3-1
3.2	Cargoes covered by the IMSBC Code	3-1
3.3	Berthing	3-2
3.4	Supervision	3-2
3.5	Identification, packing, marking, labelling or placarding and certification	3-2
3.6	Emergency procedures.....	3-2
3.7	Emergency information	3-3
3.8	Fire precautions.....	3-3
3.9	Fire fighting	3-4
3.10	Environmental precautions.....	3-4
3.11	Pollution combating.....	3-4
3.12	Reporting of incidents	3-4
3.13	Inspections.....	3-5
3.14	Hot work and other repair or maintenance work.....	3-5
3.15	Contaminated wastes.....	3-5
3.16	Mechanical equipment used for stacking.....	3-6
3.17	Alcohol and drug abuse	3-6
3.18	Weather conditions	3-6
3.19	Lighting	3-6
3.20	Handling equipment.....	3-6
3.21	Protective equipment	3-6
3.22	Signals.....	3-6
3.23	Communications.....	3-7
3.24	Areas	3-7
3.24.1	Dangerous cargo areas	3-7

3.24.2	Lorry parking areas.....	3-7
3.24.3	Special areas for damaged dangerous cargoes and wastes contaminated with dangerous cargoes.....	3-7
3.24.4	Repairing/cleaning facilities	3-8
3.25	Reception facilities	3-8
3.26	Training	3-8
4	CLASSIFICATION OF DANGEROUS GOODS, HANDLING, LOADING / UNLOADING, HANDLING, SEPARATION, STACKING AND STORING	4-1
4.1	Classification of Dangerous Goods	4-1
4.2	Dangerous Goods Marking, Labels, Placards.....	4-1
4.3	Separation tables on board and shore facility according to the classes of dangerous cargoes.	4-2
4.4	Segregation distances and terms of hazardous loads in warehouses.	4-2
5	HANDBOOK OF DANGEROUS GOODS.....	5-1
6	PROCEDURES FOR THE OPERATION	6-1
6.1	Procedures for the safe docking, mooring, loading/unloading, sheltering or mooring of ships carrying dangerous cargo, day and night.	6-1
6.2	Procedure of according to the seasonal conditions additional measures that Loading/Unloading, operation of dangerous cargo should be taken by port facilities	6-1
6.3	Procedures on keeping any inflammable, combustible and explosive materials away from operations which cause or are likely to cause sparking and abstaining from operating any tools, apparatus or device which cause or are likely to cause sparking in areas where hazardous materials are handled, stowed and stored	6-2
7	DOCUMENTATION, CONTROL AND RECORD	7-1
7.1	Procedures regarding to all necessary documents, information and certification relating to dangerous substances and their procurement and control by the relevant persons	7-1
7.2	Procedures of keeping a regular and accurate current list of all hazardous substances in the port facility area and other relevant information.....	7-1
7.3	Procedures regarding to appropriate identification of hazardous substances delivered to the facility, correct use of shipping names of dangerous cargo, certification, packaging, labeling and declaration, inspection on loading and transport of dangerous cargo in the certified and proper package, container or cargo unit in a safety way and reporting of inspection results.....	7-2
7.4	Procedures related to procurement of safety data sheets (SDS).	7-2
7.5	Procedures for records and statistics of dangerous cargo.....	7-2
7.6	Information about the Quality Management System.....	7-2
8	EMERGENCY SITUATION, EMERGENCY PREPAREDNESS AND RESPONSE.....	8-3
8.1	Response procedures for hazardous substances that are dangerous for life, property and/or environment and hazardous situations involving hazardous materials	8-3
8.2	Information on resource, capability and capacity of the port facilities regarding to respond to emergencies.	8-5
8.3	Regulations related to the the first aid for accidents involving dangerous substances.....	8-5
8.4	Onsite and offsite Notifications required to be made in case of emergency.....	8-5
8.5	The procedures for reporting accidents.	8-6
8.6	Coordination, support and cooperation method with authorities.....	8-7
8.7	Emergency evacuation plan for the evacuation of the ship and vessels from the port facility in case of emergency	8-7

8.8	Procedures for handling and disposal of the damaged dangerous cargo and wastes contaminated with dangerous cargo.....	8-7
8.9	Emergency drills and their records.....	8-8
8.10	Information on fire protection systems.....	8-8
8.11	Procedures for approval, inspection, testing, maintenance and availability of the fire protection system.....	8-8
8.11.1	Fire-Protection Water Tanks and Fire-Protection Water.....	8-8
8.11.2	Fire-Protection Water Pumps.....	8-8
8.11.3	Sprinkler System.....	8-9
8.11.4	Fire Protection Hydrant Installation.....	8-9
8.11.5	Portable Extinguishers.....	8-9
8.11.6	Protection against freezing.....	8-10
8.12	The measures to be taken in case of failure on fire protection systems.....	8-10
8.13	Other risk control equipment.....	8-10
9	SAFETY AND HEALTH AT WORK MEASURES.....	9-1
9.1	Occupational health and safety measures.....	9-1
9.1.1	Risk assessment.....	9-1
9.1.2	Emergencies.....	9-2
9.1.3	Workers' education and informing them.....	9-3
9.2	Information about the personal protective clothes and procedures to use them.....	9-3
9.3	Closed area entry permit measures and procedures.....	9-4
10	OTHER POINT.....	10-1
10.1	Validity of the Hazardous Substances Compliance Certificate.....	10-1
10.2	Responsibilities of the Dangerous Goods Safety Consultant.....	10-1
10.3	Matters for carriers of the hazardous substances arriving/leaving port facility by land (matters on required documents that must be available in the road vehicle at the entrance/exit of port or port facility area, equipment and tools required for this vehicles, speed limits in the port area etc.).....	10-2
10.4	Matters for carriers of the hazardous substances arriving/leaving port facility by sea (matters on day/night signals to be shown by ships carrying dangerous cargo and vessels, cold and hot work procedures in ships and so on.).....	10-2
10.5	Accident Prevention Policy.....	10-2
10.6	Hot Work Procedure.....	10-4
10.7	Responsibilities of Personnel in Operation.....	10-7
10.8	Safe Handling of Dangerous Goods Operation Procedure Checklist.....	10-9
11	ATTACHMENTS.....	11-1
11.1	General Layout Plan of the Port Facility.....	11-1
11.3	Emergency Contact Points and Communication Information.....	11-3
11.4	General Layout Plan of Areas Where Dangerous Goods Are Handled.....	11-4
	It is as shown in the general layout plan.....	11-4
11.5	General Fire Plan of the Facility.....	11-5
11.5	Emergency Plan.....	11-6
11.6	Emergency Assembly Areas Plan.....	11-7
11.7	Emergency Management Scheme.....	11-8
11.8	Dangerous Goods Handbook.....	11-9
11.9	Spill Areas and Equipment for CTUs and Packages, Entrance/Exit Drawings... 10	11-10
11.10	Inventory of Port Service Vessels.....	11-11
	Provided through outsourced services.....	11-11
11.11	Maritime Coordinates of the Regional Port Authority's Administrative Boundaries, Anchorage Areas, and Pilot Boarding/Disembarkation Points.....	11-12

11.14	Personal Protective Equipment (PPE) Usage Map.....	11-14
11.15	Dangerous Goods Incident Report Form.....	11-15
11.16	Notification Form for Inspection Results of Dangerous Goods CTUs.....	11-16
11.17	Other Required Attachments	11-17
12	ABBREVIATIONS.....	12-1
13	DEFINITIONS.....	13-1

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	1-1
	 DANGEROUS GOODS HANDLING GUIDE 				

1 ENTRY

1.1. The entry and presence of dangerous cargoes in port areas and any consequential handling should be controlled to ensure the general safety and security of the area, the containment of the cargoes, the safety of all persons in or near the port area, and the protection of the environment.

1.2. The safety of life at sea and the safety and security of a ship, its cargo and its crew in a port area are directly related to the care which is taken with dangerous cargoes prior to loading or unloading, and during their handling.

1.3. These Recommendations are confined to dangerous cargoes which are in a port area as part of the transport chain. These Recommendations do not apply to dangerous substances which are used in a port area or are for general storage in the port area, but Governments may wish to control such use and storage by national legal requirements. Should a substance covered by either of these exclusions subsequently be shipped, these Recommendations should then be applied, even though the substance is already in the port area.

1.4. An essential pre-requisite for the safe transport and handling of dangerous cargoes is their proper identification, containment, packaging, packing, securing, marking, labelling, placarding and documentation. This applies whether the operation takes place in a port area or at premises away from a port area.

1.5. Whilst the total transport chain includes inland, port and marine elements, it is essential that every care is taken by those responsible for the matters in 1.4 and that all relevant information is passed to those involved in the transport chain and to the final consignee. Attention should be paid to the possible differing requirements for different modes of transport.

1.6. The safe transport and handling of dangerous cargoes is based on correct and accurate application of regulations for transport and handling of such cargoes and depends on appreciation by all persons concerned of the risks involved and on the full and detailed understanding of the regulations. This can only be achieved by properly planned and carried out training and retraining of persons concerned.

1.7. The codes and guides are under continuous review and are regularly revised. It is essential that only the most up-to-date editions are used. The contents of these codes and guides have been repeated in these Recommendations only to the extent necessary.

1.8. In preparing this guide IMDG CODE, ERG 2012 and IMO 1216 CR. documents have been applied to and the informations are used.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	1-2
	DANGEROUS GOODS HANDLING GUIDE				

1.1 General information of the port facility

The general information of the property is as follows in the information form provided below.

1	Facility operator name/title	NUH ÇİMENTO SANAYİ A.Ş.		
2	Contact details of the port operator (address, telephone, fax, e-mail and web page)	Hacı Akif Mah. D-100 Karayolu Cd. No:92 Hereke/Körfez/KOCAELİ 0262 316 20 00 0262 316 25 30 nuhport@nuhcimento.com.tr www.nuhcimento.com.tr		
3	Name of the Port facility	NUH ÇİMENTO SANAYİ A.Ş.LİMAN TESİSLERİ		
4	The province where the facility is located	KOCAELİ		
5	Contact details of the port facility (address, telephone, fax, email and web page)	Hacı akif mh.D-100 Karayolu Cd. No:92 Hereke/Körfez/KOCAELİ 0262 316 20 00 0262 316 25 30 nuhport@nuhcimento.com.tr www.nuhcimento.com.tr		
6	Geographical area where the property is located	MARMARA REGION		
7	Regional Port Authority to which the facility is affiliated and contact details	KOCAELİ REGIONAL PORT AUTHORITY Adress: Atalar Mah.Sahil Yolu Cad.No:26 Yarımca-Körfez/KOCAELİ Tel: 0 262 528 37 54 e-posta: kocaeli.liman@uab.gov.tr		
8	The Municipality to which the facility is affiliated and contact details	KÖRFEZ MUNICIPALITY Adress: Mimar Sinan Mahallesi, Eşref Bitlis Caddesi N0: 369 Körfez/Kocaeli Telefon: (0262) 528 23 02 e-posta: bilgi@korfez.bel.tr		
9	Name of the Free Zone or Organized Industrial Zone where the facility is located	İSTANBUL REGIONAL DIRECTORATE		
10	Validity date of Port Facility Operation Permit/Temporary Operation Permit Certificate	21.12.2025		
11	Operating status of the facility (X)	Own cargo and additional 3rd party (X)	Own cargo (...)	3rd Party (...)
12	Name and surname of the property manager, contact details (telephone, fax, e-mail)	Güner DÜVEN 0 262 316 2098 0 505 179 1979 guner.duven@nuhcimento.com.tr		
13	Name and surname of the facility's hazardous cargo operations officer, contact details (telephone, fax, e-mail)	Güner DÜVEN 0 262 316 2098 0 505 179 1979 guner.duven@nuhcimento.com.tr		
14	Name and surname of the facility's Dangerous Goods Safety Consultant, contact details (telephone, fax, e-mail)	Yeşil TMGDK – Serkan EKİCİ GSM: 05074777090 email: serkan.ekici@yesilgrup.com.tr		
15	Port Facility sea coordinates	41° 46’ 50’’ KUZEY - 029° 36’ 25’’ DOĞU		
16	Types of dangerous cargoes handled at the plant (MARPOL Annex-I, IMDG Code, IBC	IMSBC Code		

		Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
			20.09.2022	-	22.10.2025	1-3
		DANGEROUS GOODS HANDLING GUIDE				
	Code, IGC Code, IMSBC Code, Grain Code, TDC Code and asphalt/bitumen and scrap loads)					
17	Dangerous cargoes handled at the facility (Loads other than the IMDG Code from the types of cargo in Article 16 will be written separately. Additional cargo request will be forwarded to the Regional Port Authority with Annex-1 form. Will be added to TGHR when deemed appropriate)			Loads A, B, C groups within the scope of IMSBC Code		
18	Classes for handling cargo subject to IMDG Code			N/A		
19	IMSBC Subject to Code, groups in the characteristic table for Cargo handled			B group loads		
20	Types of ships that can dock at the facility			General cargo – Dry bulk		
21	Distance of the facility to the main road (kilometers)			300 Meter		
22	Distance of the property to the railway (kilometers) or railway connection (Yes/None)			70 Meter. It has no connection to the railway.		
23	Name of the nearest airport and distance from the property (kilometers)			50 km (Sabiha Gökçen Airport)		
24	Load handling capacity of the plant (Ton/Year; TEU/Year; Vehicle/Year)			4.500.000 ton / YEAR		
25	Whether scrap handling is carried out at the plant			N/A		
26	Is there a border crossing? (Yes/No)			No		
27	Is there a custom field? (Yes/No)			No		
28	Load handling equipment and capacities			Conveyor belt system – Shore Cranes-RORO Ramp		
29	Storage tank capacity (m3)			No		
30	Outdoor storage (m2)			-		
31	Semi-enclosed storage (m2)			No		
32	Indoor storage (m2)			No		
33	Designated fumigation and/or fumigation clearance area (m2)			No		
34	Name/title of the pilotage and tug services provider contact details			PILOTAGE ANKAŞ – TUGBOAT SANMAR		
35	Has a Security Plan been published? (Yes/No)			Yes		
36	Waste Reception Facility capacity			Waste Type	Capacity (m3)	
				There is no dirty ballast, slop, sludge, bilge water, toxic liquids, wastewater, or garbage. IZAYDAS EXEMPTION AGREEMENT IN EXISTENCE		

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	1-4
	DANGEROUS GOODS HANDLING GUIDE				

37	Features of docks/piers, etc : Steel Carcass Structure				
Dock/Pier No	Height (meters)	Width (meters)	Maximum water depth	Minimum water depth	Largest berth-up vessel (DWT/GRT)
Pier	595	50 - 150	15	6	100.000 DWT
Ro-Ro jetty		40	1	5	2500 DWT
Name of the pipeline (if available at the plant)			Number (pcs)	Length (meters)	Diameter (inch)
CONVEYOR LINE			1	300 Meters	3

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	1-5
	DANGEROUS GOODS HANDLING GUIDE				

1.2 Loading/unloading, handling and storage procedures for dangerous cargoes handled and temporarily stored at the port facility

1.2.1 General

Some of the cargoes defined as Class 1 explosives (save Class 1.4), Class 7 radioactive materials and Class 6.2 infectious substances in IMDG code shall not be taken inside the port facility. These cargoes are defined as dangerous cargoes which cannot be permitted absolutely and if the regulatory authority permits, they are processed as transit cargo. They are loaded and unloaded at a private area within the port facility and taken away by dispatching without keeping them at the port facility. The safety rules specified in this guideline will be applied if these cargoes are handled. Cargoes which are wrapped, packed or prepared in the form of bale/bunch/truss within the scope of MARPOL Annex-I and IMDG codes general cargoes and project cargoes are handled. All kinds of bulk cargo, mines, coal, cement, clinker, fertilizers containing ammonium nitrate, all kinds of solid bulk cargoes of this type within the scope of IMSBC code and all kinds of cereals shipped as bulk cargo within the scope of Grain code are handled at the cereal port facility. Liquid cargoes within the scope of IBC code are handled at the port facility within the scope of IBC code. Cargoes within the scope of IGC code are not handled.

Fulfillment of the conditions specified below will be ensured as regards handling the dangerous cargoes coming to the port facility, keeping them temporarily at the port facility, making their stowage and segregation and storage for safety of the port facility, employees and ships at the port facility.

A coordination meeting will be held at least 1 day prior to the acceptance of dangerous cargoes to the port facility and the representatives of operation, Field planning, HSE unit, TMGD and other related persons shall participate to the meeting. (The resolution to hold such meeting will be taken through the operation or HSE/TMGD departments regarding the dangerous cargoes handled routinely which are accepted to the port)

Following issues will be discussed during the coordination meeting with regard to the dangerous cargo (es) to be accepted to the port:

1. Risk arising from dangerous cargo
2. Interaction with dangerous cargoes existing at the port facility,
3. Interaction with cargoes planned to be accepted to the port facility in the near future,
4. Conditions for stowage
5. Conditions for segregation
6. Requirement of materials and equipment with respect to emergency response
7. Sufficiency of emergency response equipments
8. Interaction with the neighboring area (s)

The issues mentioned herein above will be discussed within the scope of current IMDG CODE documents and a management decision for accepting/rejecting will be taken.

If a decision is taken at the meeting in favor of accepting the dangerous cargo, management, operation, storage, safety and emergency response departments shall be notified and the necessary preparations and acceptance process will be commenced.

If it is required to notify the Regional Port Authority, the situation shall be notified to the Regional Port Authority in writing by specifying the reasons.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	1-6
	 DANGEROUS GOODS HANDLING GUIDE 				

1.3 Operational procedure of safe handling of bulk solid dangerous cargoes:

Loading or unloading of solid dangerous cargoes will be made direct delivery plan at the berths within our port facility

1.3.1 Application

They are loaded with the help of clutches, conveyors and air compressors.

The loading or unloading program will be prepared 1 day before at the operation meeting. Number of equipments and cranes, teams and shifts as well as the port to be used shall be specified at this meeting. The personnel who will work in the operation will be provided with information as regards the risks of the cargo and they will be equipped with the necessary protective outfit. Environmental safety is ensured in line with HSE procedure. Personnel will be assigned neither to the hold of the ship nor to the work area before the gas are measurements conducted.

Necessary warnings will be made in order that the trucks do not to make loading exceeding loading limit and people in charge will pay necessary attention with respect to this issue.

The drivers will wait at a specified location away from the vehicle during the loading and unloading of vehicles. It will be controlled if the driver has the necessary protective equipments or not.

The shift superintendent will be responsible from controlling the work security, control of equipments, entry and exit of outsiders, safe handling of the cargo, environmental cleaning and duly performance of these works.

Loading and unloading in accordance with the cargo plan is within the liability of berth operators.

If the evacuation of ship is partially completed, gas measurements will be conducted prior to assignment for the evacuation of cargo in the hold of the ship.

Canvas is laid between the ship and the port and a responsible person is assigned for cleaning the cargo scattered around.

I hereby confirm its compliance as a Dangerous Goods Safety Advisor.

Signature:



1.3.2 Requirements

Issues as regards additional safety precautions to be taken at the port facility and these precautions will be provided by the operations department.

The shift superintendent or the berth operator will be assigned to be responsible from handling of solid bulk dangerous and their duties are defined within quality management system.

Electrical equipments, devices and tools to be used at the areas where dangerous materials are handled should have adequate standards for being used at flammable, sparkling and explosive environments. Electrical lamps other than arc lamps shall be used in loading operations of solid bulk dangerous cargoes and these lamps should be gastight.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	1-7
	 DANGEROUS GOODS HANDLING GUIDE 				

Adequate number of personal protective clothing, equipment and outfit shall be provided in line with the specifications of solid bulk dangerous cargoes which are handled and the risks they can impose.

Water balls should be place in vicinity of areas where dangerous materials like coal, which have spontaneous combustion but not affected by water, are stored and watering works should be carried out in a way to avoid combustion. It will be considered if there is a drainage system for collecting the polluted water in the environment when the temporary storage area is announced.

Canvas to be used for avoiding the solid bulk dangerous cargoes from falling to the sea during evacuation or while loading to the ship, will be kept between the ship and the port during the operations.

The master who will load/unload the solid bulk dangerous cargoes will receive the detailed loading or unloading plan which includes details as to the position and quantity of the cargo in the ship from the berth operator prior to the beginning to loading or unloading process. An agreement shall be reached between the master and the berth operator as to the said loading or unloading plan.

The master and the berth operator will ensure, within their respective areas of responsibility, that operations regarding transport, handling or loading or unloading of solid bulk dangerous cargoes are done in accordance with “International Maritime Solid Bulk Cargo Code (IMSBC Code)”, “the Code of Practice for the Safe Loading and Unloading of Bulk Carriers (BLU Code), “Legislation on Safe Loading and Unloading of Bulk Carriers” promulgated in Official Gazette dated 31.12.2005 number 26040 and “Manual on Loading and Unloading of Solid Bulk Cargoes for Terminal Representatives (IMO MSC/Circ.1160, MSC/Circ.1230 and MSC.1/Circ.1356)”.

1.3.3 Documentation

Passenger ships and cargo ships of 500 gross tonnage or over constructed on or after 1 September 1984 and carrying dangerous goods, shall comply with the requirements of regulation II-2/19 of SOLAS 1974. In this connection, such ships are required to carry on board a Document of Compliance in accordance with SOLAS 1974, regulation II-2/19.4 as evidence that the ship complies with the special requirements for ships carrying dangerous goods stipulated in SOLAS regulation II-2/19. Cargo ships of less than 500 gross tonnage constructed on or after 1 February 1992 shall comply with the requirements of regulation II-2/19 of SOLAS 1974, unless Administrations have reduced the requirements and this has been recorded in the Document of Compliance.

The Document of Compliance provides information on the classes of dangerous goods that may be carried on deck and in each compartment of the ship.

On board a ship carrying packaged dangerous cargoes, additionally a special list or manifest setting out the dangerous goods and their location or a detailed stowage plan is required.

1.3.4 Responsibility for compliance

When solid bulk dangerous cargoes are carried, handled or stowed, the master of a ship and berth operator within their respective areas of responsibility should ensure that the loading and unloading operations are carried out in accordance with the Bulk Cargo (BC) Code and the Code of Practice for the Safe Loading and Unloading of Bulk Carriers, where applicable, and the Manual on Loading and Unloading of Solid Bulk Cargoes for Terminal Representatives.

1.3.5 Emission of harmful dusts

Where the transport, handling or stowage of solid bulk dangerous cargoes may give rise to the emission of dust, all necessary practicable precautions should be taken to prevent and minimize the emission of such dusts and to protect persons and the environment from them.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	1-8
	 DANGEROUS GOODS HANDLING GUIDE 				

The precautions should include the use of appropriate protective clothing, respiratory protection, and barrier creams, when needed as well as personal washing and hygiene and laundering of clothing.

1.3.6 Emission of dangerous vapor/oxygen deficiency

Where the transport or handling of solid bulk dangerous cargoes may give rise to the emission of a toxic or flammable vapor, all necessary practicable precautions should be taken to prevent and minimize the emission of such vapors and to protect persons from toxic vapors.

Whenever solid bulk dangerous cargo which may emit a toxic or flammable vapor is stowed or carried, an appropriate instrument for measuring the concentration of the toxic or flammable vapor should be provided.

1.3.7 Emission of explosive dusts

Where the transport or handling of solid bulk dangerous cargoes may give rise to the emission of dust that is liable to explode on ignition, all necessary practicable precautions, such as availability of fire hose, should be taken to prevent such an explosion and to minimize the effects of an explosion if one should occur.

Precautions include ventilating an enclosed space to limit the concentration of dust in the atmosphere, avoiding sources of ignition, minimizing the heights of walls of materials, and hosing down rather than sweeping.

1.3.8 Spontaneously combustible substances and substances that react with water

Solid bulk dangerous cargoes which, on contact with water, may evolve flammable or toxic vapors or become liable to spontaneous combustion, should be kept as dry as reasonably practicable. Such cargoes should be handled only during dry weather conditions.

1.3.9 Oxidizing substances

Solid bulk dangerous cargo that is an oxidizing substance should be transported, handled and stowed in a manner that prevents in so far as reasonably practicable, contamination with combustible or carbonaceous materials. Oxidizing substances should be kept away from any source of heat or ignition.

1.3.10 Incompatible materials

Solid bulk dangerous cargoes should be carried, handled and stowed in a manner that prevents any dangerous interaction with incompatible materials.

1.3.11 Cargo which can be handled at our facility in accordance with IMSBC CODE

1.3.11.1 Group B cargoes (which possess a chemical hazard)

Group B cargoes are classified in two ways within the IMSBC Code: 'Dangerous goods in solid form in bulk' (under the International Maritime Dangerous Goods (IMDG) Code; and 'Materials hazardous only in bulk' (MHB).

You will find this information in the "characteristics" section of the cargo's schedule. Cargoes classified as dangerous goods in solid form in bulk will also have a 'UN' number in the Bulk Cargoes Shipping Name.

Dangerous goods in solid form in bulk

In the Code these cargoes are classed as follows:

Class 4.1: Flammable solids

Class 4.2: Substances liable to spontaneous combustion

Class 4.3: Substances which, in contact with water, emit flammable gases

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	1-9
	 DANGEROUS GOODS HANDLING GUIDE 				

Class 5.1: Oxidizing substances

Class 6.1: Toxic substances

Class 8: Corrosive substances

Class 9: Miscellaneous dangerous substances and articles.

Materials hazardous only in bulk (MHB)

Materials hazardous only in bulk (MHB) MHB cargoes are materials which possess chemical hazards when transported in bulk that do not meet the criteria for inclusion in the IMDG classes above. They present significant risks when carried in bulk and require special precautions. They are described as follows:

Combustible solids: materials which are readily combustible or easily ignitable

Self-heating solids: materials that self-heat

Solids that evolve into flammable gas when wet: materials that emit flammable gases when in contact with water

Solids that evolve toxic gas when wet: materials that emit toxic gases when in contact with water

Toxic solids: materials which are acutely toxic to humans if inhaled or brought into contact with skin

Corrosive solids: materials which are corrosive to skin, eyes, metals or respiratory sensitizers.

The risks Group B cargoes present

The major risks associated with Group B cargoes are fire and explosion, release of toxic gas and corrosion.

Coal

Coal may create flammable atmospheres, heat spontaneously, deplete oxygen concentration and corrode metal structures. Some types of coal can produce carbon monoxide or methane.

Petroleum coke

Petroleum coke which is not calcined is sensitive to heat. It can get burned under high temperatures. There is no specific requirement for ventilation at the storage areas. There are no special requirements during transport, unloading and cleaning. It is required to wear gloves, work uniform, shoes and helmets as protective clothing. Spray nozzles should be kept available.

Direct reduced iron (DRI)

DRI may react with water and air to produce hydrogen and heat. The heat produced may cause ignition. Oxygen in enclosed spaces may also be depleted.

Metal sulphide concentrates

Some sulphide concentrates are prone to oxidation and may have a tendency to self-heat, leading to oxygen depletion and emission of toxic fumes. Some metal sulphide concentrates may present corrosion problems.

Organic materials

Ammonium nitrate-based fertilizers Ammonium nitrate-based fertilizers support combustion. If heated, contaminated or closely confined, they can explode or decompose to release toxic fumes and gases.

Wood products transported in bulk

Wood products transported in bulk are listed in a new schedule to the Code: Wood Products – General. They include logs, pulpwood, roundwood, saw logs and timber. These cargoes may cause oxygen depletion and increase carbon dioxide in the cargo space and adjacent spaces.

These are wood products loaded and discharged by methods such as elevators and grabs. They are distinct from wood products listed in other schedules..

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	2-1
	DANGEROUS GOODS HANDLING GUIDE				

2 RESPONSIBILITIES

All parties engaged in the transport of dangerous goods; It has to take all necessary measures to make transportation safe, secure and harmless to the environment, to prevent accidents and to minimize the damage when an accident occurs. In this context, the responsibilities in the third part of the "Regulation on Carriage of Dangerous Goods by Sea and Loading Safety" published in the Official Gazette dated 14 November 2021 and numbered 31659 and in ADR 1.8.3 are listed below.

2.1 General responsibilities of all sides

2.1.1 To make safe transportation, safe and environmentally harmless, to prevent accidents and to ensure that all necessary measures are taken to minimize the damage as much as possible when an accident occurs.

2.1.2 In emergency situations such as fire, leakage, spill that occur during the transportation of dangerous cargoes, to benefit from the EmS Guide including Emergency Response Methods and Emergency Schedules for Ships Carrying Dangerous Goods.

2.1.3 To benefit from the Medical First Aid Guide (MFAG) included in the IMDG Code annex in order to properly provide the necessary medical first aid to persons affected by the damages of dangerous loads and to health problems caused by accidents involving these cargoes.

2.2 Responsibilities of the cargo authority

2.2.1 To Prepare mandatory documents, info and documents related to dangerous cargoes and to ensure that these documents are present with the cargo during the transportation activity.

2.2.2 To ensure that dangerous cargoes are classified, packaged, marked, labelled and plated in accordance with their type.

2.2.3 To ensure that dangerous cargoes are loaded, stacked and securely fastened in accordance with the rules and in accordance with the rules in approved packaging and cargo transport units.

2.3 Responsibilities of the carrier

2.3.1 Request mandatory documents, information and documents related to dangerous cargoes from the cargo person concerned and ensure that they are present with the cargo during the transportation activity.

2.3.2 To check the regulatory compliance of dangerous cargoes classified, packaged, marked, labelled and plated by the cargo subject.

2.3.3 To check that dangerous cargoes are packaged in accordance with the rules using approved packaging and cargo handling units, that they are safely loaded into the cargo transport unit and that they are securely fastened.

2.4 Responsibilities of the port facility operator

2.4.1 Not to approved ships carrying dangerous cargoes at port facility without the permission of the Regional Port Authority.

2.4.2 The "Port Facility Rules" prepared within the scope of the facility rules, cargo handling rules and relevant legislation shall notify the ship to be will approach via the ship agency or via e-mail.

2.4.3 It does not handle dangerous cargoes for which it has not received permission from the Administration and does not victimize the ships that will dock by planning in this context.

2.4.4 Requires mandatory documents, info and documents related to dangerous cargoes from the cargo owner and ensures that they are found together with the cargo. To decide whether to accept or handle the dangerous cargo if the relevant documents, information and documents cannot be provided by the cargo person.

2.4.5 To share all the data that may be required according to the characteristics of the cargo with the ship owner and to reconcile the loading or unloading operation in accordance with the legislation and rules. Not to make changes in the operation without the knowledge of the ship's contact.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	2-2
	 DANGEROUS GOODS HANDLING GUIDE 				

2.4.6 To determine the operating limits taking into account the safe working capacity of the facility and the weather forecasts. To take the necessary precautions to keep the ship safely connected to the port and to carry it out. To Set limits in the "Ship Emergency Evacuation" plan.

2.4.7 Check the transport document containing information that the dangerous cargoes arriving at the facility have been properly classified, packaged, marked, labelled, plated and safely loaded into the cargo transport unit.

2.4.8 To ensure that the personnel involved in the handling of dangerous goods and the planning of this handling are certified by receiving the necessary training. To not assign non-certified personnel to these operations.

2.4.9 Ensure that dangerous cargo handling equipment at the facility is operational and that relevant personnel are trained and certified in relation to the use of such equipment.

2.4.10 To ensure that personnel use personal protective equipment appropriate to the physical and chemical characteristics of the dangerous cargo by taking occupational safety measures in the port facility.

2.4.11 To ensure that activities related to dangerous cargoes are carried out in areas established in accordance with these works.

2.4.12 To equip the interface reserved for ships to load or unload dangerous liquid bulk cargoes with installations and equipment suitable for this work.

2.4.13 Keep an up-to-date list of all dangerous cargoes on board ships docked at the facility and in indoor and outdoor areas at the facility. To provide this information to the relevant persons upon request.

2.4.14 To inform the Regional Port Authority about the immediate risk posed by the dangerous cargoes handled or temporarily stored at the facility and the measures taken for this with the document "Risk assessment for Dangerous Cargoes". To revise this document at least once every 3 years.

2.4.15 To report accidents related to dangerous cargoes, including accidents at the entrance to closed areas, to the Regional Port Authority.

2.4.16 To provide the necessary support and cooperation in the controls and inspections carried out by the administration and the Regional Port Authority.

2.4.17 To take fire, environmental and other safety measures appropriate to the class of dangerous cargo in the area where the operation is made. In the areas where dangerous loads are handled, fire extinguishing systems and first aid units are ready for use at any time and the necessary controls are periodically carried out.

2.4.18 Obtain permission from the Regional Port Authority in accordance with the "Hot Work Working Procedure" before the hot work and operations to be carried out in the areas where dangerous cargoes are handled and temporarily stored.

2.4.19 Prepare an emergency evacuation plan for the evacuation of ships from port facility in case of emergency. Submit the prepared ship emergency evacuation plan to the Regional Port Authority.

2.4.20 To ensure that the internal loading of the load carrying units is carried out in accordance with the loading safety rules at the facility.

2.5 Responsibilities of the ship's contact person

2.5.1 To ensure that the cargo to be carried by the ship is certified as suitable for carriage and that the cargo holds, cargo tanks and cargo handling equipment are in a condition suitable for cargo transportation.

2.5.2 To request all mandatory documents, information and documents related to dangerous cargoes from the cargo owner and to ensure that they are present with the cargo during the transportation activity.

2.5.3 To ensure that the documents, information and documents required to be present on board the ship in relation to dangerous cargo within the scope of legislation and international conventions are appropriate and up to date.

2.5.4 To check the transport document containing information that the cargo transport units loaded on the ship are properly marked, plated and safely loaded.

2.5.5 To inform the relevant ship personnel about the risks of dangerous cargoes, safety procedures, safety and emergency measures, response methods and the like.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	2-3
	 DANGEROUS GOODS HANDLING GUIDE 				

2.5.6 To keep up-to-date lists of all dangerous cargoes on board and to make declarations to the relevant persons upon request.

2.5.7 To ensure that the loading program, if any, on board is approved and certified and kept operational.

2.5.8 To inform the Regional Port Authority and the port facility of the immediate risk posed by the dangerous cargoes on board the vessel docking the shore facility and the measures taken to prevent it.

2.5.9 Refusal to accept the dangerous cargo to carry in the event of a leak in the dangerous cargo or if there is such a possibility.

2.5.10 Report dangerous cargo accidents that occur on board the vessel while sailing or on port facility to the Regional Port Authority.

2.5.11 To provide the necessary support and cooperation in the controls and inspections carried out by the administration and the Regional Port Authority.

2.5.12 Not to accept to carry dangerous cargoes that are not included in the ship certificates issued by the relevant institutions and organizations.

2.5.13 To ensure that shipowners in charge of handling dangerous goods use personal protective equipment appropriate to the physical and chemical properties of the cargo during handling.

2.5.14 To ensure the requirements for the safety of loading of cargoes loaded on the vessel.

2.6 Training Responsibilities

2.6.1 The procedures and principles related to the trainings to be received by the personnel working in the port facilities handling the cargo in accordance with the Regulation on the Transport of Dangerous Cargo by Sea and the Safety of Loading shall be determined by the Administration.

2.6.2 The Administration shall carry out the necessary work for the implementation of IMO trainings that are required by IMO or, if deemed appropriate by the Administration, are advisory.

2.6.3 If the knowledge and skills of the personnel are found to be insufficient during the inspections carried out in the port facilities, the Administration may request that the trainings be repeated.

2.6.4 For the practical applications of the trainings within the scope of training questions, the opportunities of the Ministry are primarily utilized.

2.7 Loading Safety Responsibilities

2.7.1 The Regional Port Authority stops the handling operation at the port facility when it deems any risk and does not start it until the risk is eliminated.

2.7.2 The ship cannot be loaded more than the loading limit, taking into account the loading limit brand. In the event of such a situation, the ship is not allowed to sail and administrative action is taken against the ship owner within the scope of the regulation.

2.7.3 It is the responsibility of the ship to monitor the load and ballast water arrangement throughout the loading or unloading operation so that the structure of the ship is not subject to excessive stress.

2.7.4 Care is taken by the port and the ship to ensure that the slope is uninclined, but if a slope (tilt) is required during loading, it is ensured that it is as short as possible. In order to avoid structural damage to the vessel, the approved stability curl is ensured to be properly balanced, loading and unloading.

2.7.5 In adverse meteorological and oceanographic conditions that may affect the cargo handling operation, the handling operation shall be suspended by the captain until the conditions improve

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	3-1
	 DANGEROUS GOODS HANDLING GUIDE 				

3 POLICIES/APPLIED RULES AND MEASURES TO BE FOLLOWED BY PORT FACILITY

How the precautions regarding the issues specified in the third section of the "Regulation on the Transport of Dangerous Goods by Sea and Loading Safety" are carried out and how the requirements of the provisions in the fourth section will be met are explained separately under this section.

The rules and measures given in this chapter are elaborated in Chapters 1,4,6,7,8,9 and 10 under Hazardous Material Emergency Plan and Accident Prevention Policy. The requirement for infrastructure is met by our port facilities.

3.1 Loading safety

BLU Code and BLU Manual, Safe Practice Code for Load Stacking and Safety (CSS Code), Code of Practice for Packing Cargo Transport Units (CTU Code) and Safe Practices Code for Ships Carrying Timber Cargo on Deck in order to ensure safe loading of the cargo on the ship. TDC Code) provisions are complied with.

Stacking of loads is carried out in accordance with the relevant legislation and international agreements we are a party to.

The ship cannot be loaded more than the loading limit considering the loading limit brand. If such a situation is detected, the ship will not be allowed to sail and administrative action will be taken against the person in charge of the ship within the scope of Article 22.

The loading-unloading plan before the handling operation and the results of the draft survey or weighbridge survey are submitted to the Regional Port Authority by the ship owner to determine the amount of loaded cargo before the ship takes off. The Administration or the Regional Port Authority may request that the draft survey or scale survey report be received from an authorized inspection firm. Precautions are taken to prevent the stability of the ship from being adversely affected by ensuring that the cargo in bulk carriers, especially single-hold bulk carriers, is loaded in such a way that it spreads over the floor of the hold (by trapping).

It is ensured that the load and ballast water patterns are monitored throughout the loading or unloading operation so that the ship's structure is not subjected to excessive stress.

Care is taken to ensure that the ship is free of heel, but if an inclination is required during loading, it is ensured that this is as short as possible. In order to avoid structural damage to the ship, balanced loading and unloading is ensured in accordance with the approved stability boucle.

In adverse meteorological and oceanographic conditions that may affect the cargo handling operation, the handling operation is stopped by the captain until the conditions improve.

In order to prevent situations such as placing the heavy load on the light load, placing the liquid load on the dry load, and spreading the smell of bad-smelling loads to other loads, loads with properties that may damage other loads are loaded in accordance with the separation rules.

All cargoes, cargo units and cargo transport units, except solid and liquid bulk cargoes, in accordance with SOLAS Chapter VI Part A Rule 5.6, in order to ensure that the safety measures related to loading, stacking, separation, handling, transportation and unloading of cargoes on the ship are fully implemented and maintained. It is loaded, stacked and secured in accordance with the Cargo Securing Manual approved by the classification societies on behalf of the Administration.

3.2 Cargoes covered by the IMSBC Code

In accordance with SOLAS Chapter VII Part A Rule 7.2.1, the use of "bulk shipping name" is mandatory in all documents related to the transport of dangerous solid bulk cargoes, the trade name of the cargo alone is not sufficient.

Ships carrying dangerous solid bulk cargoes must have a cargo manifest or special list showing the dangerous goods on board, together with their locations, in accordance with SOLAS Chapter VII Part A Rule 7.2.2. A detailed stowage plan showing the location and class of all dangerous goods on board can be used instead of the aforementioned cargo manifest or special list.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	3-2
	DANGEROUS GOODS HANDLING GUIDE				

Information on solid bulk cargoes within the scope of the IMSBC Code must be provided to the ship owners in accordance with SOLAS Chapter VI Part A Rule 2 by the cargo authorities.

Appropriate emergency response instructions are kept on board to respond to accidents caused by dangerous solid bulk cargoes.

The procedures regarding the transportation and notification of a solid bulk cargo not included in the IMSBC Code are determined by the Administration.

3.3 Berthing

Adequate and safe mooring facilities are provided; and Adequate safe access is provided between the ship and the shore.

3.4 Supervision

The port operator should ensure that areas where packages or cargo transport units are kept are properly supervised and packages or cargo transport units are regularly inspected for leakage or damage. Any leaking package or cargo transport units should only be handled under the supervision of a responsible person.

Any equipment which is used for handling and stowing processes and driven with or without power shall be checked and inspected to ensure that it is manufactured in accordance with the manufacturer's instructions and exists in good operating conditions and in compliance with proper standards.

3.5 Identification, packing, marking, labelling or placarding and certification

The port operator should ensure that dangerous cargoes entering his premises have been duly certified or declared by the cargo interests as being properly identified, packed, marked, labelled or placarded so as to comply with the appropriate provisions of the IMDG Code or, alternatively, with appropriate national or international legal requirements applicable to the relevant mode of transport.

Safe handling and segregation

A port operator transporting or handling dangerous cargoes should appoint at least one responsible person who has adequate knowledge of the national or international legal requirements concerning the transport and handling of dangerous cargoes, including the segregation of incompatible cargoes.

3.6 Emergency procedures

The port operator should ensure that appropriate emergency arrangements are made and brought to the attention of all concerned. These arrangements should include:

The provision of appropriate emergency alarm operating points;

Procedures for notification of an incident or emergency to the appropriate emergency services within and outside the port area;

Procedures for notification of an incident or emergency to the Regional Port Authority and port area users both on land and water;

The provision of emergency equipment appropriate to the hazards of the dangerous cargoes to be handled;

Co-ordinated arrangements for the release of a ship in the case of an emergency; and

Arrangements to ensure adequate access/egress at all times.

The port operator should consider the necessity of arrangements for a safe and quick emergency escape, taking into account the nature of the dangerous cargoes and any special conditions.

The "Medical First Aid Guidelines (MFAG)" annexed to IMDG Code shall be used to provide with those persons effected from damages caused by hazardous loads with medical first aid in case of any health issues occurring in consequence of accidents involving such loads.

"Emergency Schedules (EmS)" annexed to IMDG Code shall be used for any emergencies involving hazardous loads.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	3-3
	 DANGEROUS GOODS HANDLING GUIDE 				

In case of any emergencies or accidents, the first aid material to be used for response shall be kept in easily accessible locations known to personnel.

3.7 Emergency information

The port operator should ensure that a list of all dangerous cargoes in the warehouses, sheds or other areas, including the quantities, and if appropriate Proper Shipping Names, correct technical names (if applicable), UN numbers, classes or, when assigned, the division of the goods, including for class 1, the compatibility group letter, subsidiary hazard classes (if assigned), packing group (where assigned) and exact location is held readily available for the emergency services.

The port operator should ensure that the responsible person for a warehouse, shed or area, where dangerous cargoes are handled, is as far as possible aware of the status of occupancy with the dangerous cargoes in his area and is available in case of emergencies.

The port operator should ensure that the person responsible for cargo handling operations involving dangerous cargoes has the necessary information on measures to be taken to deal with incidents involving dangerous cargoes and that it is available for use in emergencies.

Electronic or other automated information processing or transmission techniques shall be employed to provide access to information.

Data sheets of hazardous materials shall normally be kept by the manufacturers of chemicals. Emergency response information and electronic databases shall be available and used in case of direct access to information.

The port operator should ensure that the port or berth emergency response procedures and port or port emergency telephone numbers are placed at prominent locations within or at warehouses, sheds or areas where dangerous cargoes are transported or handled.

The port operator should ensure that fire-fighting and pollution-combating equipment and installations are clearly marked as such and notices drawing attention to them are clearly visible at all appropriate locations.

The port operator should inform the master of any ship carrying or handling dangerous cargoes of the emergency procedures in force and the services available at the port.

3.8 Fire precautions

The port operator should ensure that:

All parts of the port and any ship moored to it are at all times accessible to emergency services;

Audible or visual alarms for emergency use are installed in the area or other means of rapid communication with emergency services are available;

The handling of dangerous cargoes are kept clean and tidy;

Before dangerous cargoes are handled, the master of a ship is informed of the location of the nearest means of summoning emergency services; and

The lighting and other electrical equipment in areas where dangerous cargoes are present on the port is of a type safe for use in a flammable or explosive atmosphere.

Places where smoking is prohibited are designated; and

Notices in a pictogram form prohibiting smoking are clearly visible at all locations and at a safe distance from places where smoking would constitute a hazard.

The port operator should ensure that equipment used in an area or space where a flammable or explosive atmosphere may exist or develop, is of a type safe for use in a flammable or explosive atmosphere and used in such a manner that no fire or explosion can be caused.

The port operator should ensure that only portable electrical equipment of a type safe for use in a flammable atmosphere is used in an area or space in which a flammable atmosphere may occur.

The port operator should ensure that electrical equipment on a wandering lead is not used in areas or spaces where a flammable atmosphere may occur.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	3-4
	DANGEROUS GOODS HANDLING GUIDE				

3.9 Fire fighting

The port operator should ensure that adequate and properly tested fire-fighting equipment and facilities are provided and readily available in accordance with the requirements of the regulatory authority in areas where dangerous cargoes are transported or handled.

The port operator should ensure that personnel involved in the handling or transport of dangerous cargoes are trained and practised in the use of fire-fighting equipment in accordance with the requirements of the regulatory authority.

3.10 Environmental precautions

The port operator should ensure that dangerous cargoes are only handled in areas which comply with the requirements of the regulatory authority.

The port operator should ensure that any damaged package, unit load or cargo transport unit containing dangerous cargoes is dealt with in accordance with the requirements of the regulatory authority and is not transported or handled unless the dangerous cargoes have been properly repacked and are in all respects fit and safe for further transport and handling.

The port operator should ensure that, if necessary, any damaged package, unit load or cargo transport unit containing dangerous cargoes is removed to a designated area for such cargoes.

Sweeping or flushing. The said loads shall not be allowed to move into sea by rainwater.

During the loading and unloading of bulk cargo to and from the vessel, necessary actions shall be taken to prevent the dumping of any load from the vessel or the dock into sea. In addition, these actions shall be taken for transshipment operations.

Necessary actions shall be taken so that soil, water or areas of water discharge is/are not contaminated with any hazardous materials handled at onshore facilities. Additionally, these actions shall be applied for the piping line used during the handling of hazardous materials and for areas with conveyor system. The capability to remove any contaminated bilge water, dirty ballast, sludge, slope and load waste from the vessel shall be provided.

3.11 Pollution combating

The port operator should ensure that adequate equipment is available to minimize the damage in case of a spillage of dangerous cargoes.

The equipment includes petroleum dispersion preventive fences, condensate lids, absorbing and neutralizing agents as well as cleaning agents and portable collection basins.

The port operator should ensure that personnel involved in the transport and handling of dangerous cargoes are trained and practised in the use of pollution combating equipment and facilities in accordance with the requirements of the regulatory authority.

3.12 Reporting of incidents

The port operator, within his area of responsibility, should ensure that, if an incident occurs during the handling of dangerous cargoes which may endanger the safety or security of persons, of ships within the port, of the port or of any other property, or the environment, the person having charge of the handling immediately causes the operation to be stopped, if it is safe to do so, and prevents it being resumed until appropriate safety measures have been taken. The port operator should require every member of his personnel to report, to the person having charge of the operation, any such incident they see to occur during the handling of dangerous cargoes.

For the purposes of responding quickly and effectively; the short and proper description of the event should be communicated to the emergency center as soon as possible to treat the injured personnel and mitigate any potential damage.

The port operator should ensure that any incident involving dangerous cargoes which may endanger the safety or security of persons, or of ships within the port or of the port or of any other property or the environment is reported immediately to the Regional Port Authority.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	3-5
	DANGEROUS GOODS HANDLING GUIDE				

The port operator should ensure that any damaged or leaking package, unit load or cargo transport unit containing dangerous cargoes is reported immediately to the Regional Port Authority and that suitable remedial action is taken

3.13 Inspections

The port operator, where appropriate, should:

Check documents and certificates concerning the safe transport, handling, packing and stowage of dangerous cargoes in the port area at the time of receipt;

Check, where practicable, packages, unit loads and cargo transport units containing dangerous cargoes to verify that they are marked, labelled or placarded in accordance with the provisions of the IMDG Code and the appropriate national or international legal requirements applicable for the mode of transport and that unnecessary labels, placards and marks have been removed and that the cargo transport units have been loaded, packed and secured in accordance with the IMO/ILO/UN ECE Guidelines for Packing of Cargo Transport Units (CTUs);

Check freight containers, tank-containers, portable tanks and vehicles containing dangerous cargoes to ensure that they have a current safety approval plate in accordance with the International Convention for Safe Containers (CSC), 1972, as amended, when applicable, or have been approved in accordance with the relevant provisions of the IMDG Code or by a certification or approval system of an appropriate authority; and

Check, by external examination, the physical condition of each freight container, tank-container, portable tank or vehicle containing dangerous cargoes for obvious damage affecting its strength or packaging integrity and for the presence of any sign of leakage of contents.

The port operator should make such checks regularly to ensure implementation of the safety precautions in the port area and the safety of transport.

If any of the checks mentioned above reveal deficiencies which may affect the safe transport or handling of dangerous cargoes the port operator should immediately advise all parties concerned and request them to rectify all deficiencies prior to any further transport or handling of dangerous cargoes.

The port operator should ensure that every necessary support will be given to the Regional Port Authority or any other person or institution entitled to carry out inspections when they intend to carry out an inspection of dangerous cargoes.

3.14 Hot work and other repair or maintenance work

The port operator should ensure that no repair or maintenance work resulting in non-availability of the emergency/fire equipment required by these Recommendations is carried out at the port without prior permission of the Regional Port Authority.

The port operator and the company carrying out the repairs, after having consulted the master of a ship, where appropriate, should ensure that they are in possession of a permit to proceed issued by the Regional Port Authority before any repair or maintenance work involving hot work, or any other such work which may lead to a hazard because of the presence of dangerous cargoes, is carried out.

A prior notice to be served for the estimated duration of hot work or the lack of equipment as a result of the need for permission shall allow all emergency response authorities, such as fire department, to make a satisfactory announcement to express their objection and recommend additional measures. In case of particular circumstances, such as any hot work to be performed in a hold or closed areas near a hold, the skilled personnel capable of determining whether specific safety measures are necessary shall perform a detailed field survey.

3.15 Contaminated wastes

3.16.1 The port operator should ensure that wastes contaminated with dangerous cargoes are immediately collected and disposed of in accordance with the requirements of the regulatory authority.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	3-6
	 DANGEROUS GOODS HANDLING GUIDE 				

3.16 Mechanical equipment used for stacking

All mechanical equipment used for stacking (whether powered or not) should be checked to ensure that they are working properly, comply with appropriate recognized standards, and are technically maintained in accordance with the manufacturer's maintenance recommendations.

3.17 Alcohol and drug abuse

The port operator, within his area of responsibility, should ensure that no person under the influence of alcohol or drugs is allowed to participate in any operation involving the handling of dangerous cargoes. Any such persons should always be kept clear of the immediate areas where dangerous cargoes are being transported or handled.

3.18 Weather conditions

The port operator, within his area of responsibility, should not permit dangerous cargoes to be handled in weather conditions which may seriously increase the risk.

3.19 Lighting

The port operator, within his area of responsibility, should ensure that areas where dangerous cargoes are handled or where preparations are being made to handle dangerous cargoes and access to such areas are adequately illuminated.

3.20 Handling equipment

The port operator, within his area of responsibility, should ensure that all equipment used in the handling of dangerous cargoes is suitable for such use and used only by skilled persons.

The port operator, within his area of responsibility, should ensure that all cargo handling equipment is of an approved type where appropriate, properly maintained and tested in accordance with national and international legal requirements.

3.21 Protective equipment

The port operator, within his area of responsibility, should ensure, when necessary, that a sufficient quantity of appropriate protective equipment is available to all personnel involved in the handling of dangerous cargoes.

Such equipment should provide adequate protection against the hazards specific to the dangerous cargoes handled and should be of an approved type or made in conformity with an approved standard.

3.22 Signals

The regulatory authority should decide if and when a ship engaged in the transport or handling of certain specified dangerous cargoes in the port area, should exhibit by day or by night any special visual signals.

The specified dangerous cargoes should include:

bulk liquids with a flashpoint below 60°C closed cup;

bulk flammable and/or toxic gases; and

explosives (other than division 1.4S), liquid desensitized explosives assigned to class 3 and solid desensitized explosives assigned to class 4.1; to the degree specified by the regulatory authority.

The reason for exhibiting a day or night signal is to advise maritime traffic and personnel within the port area about an increased hazard created by the presence of the dangerous cargoes. Vessels exhibiting such signals may be subject to the special requirements and special instructions of the Regional Port Authority.

The following four scenarios should be considered:

the ship is moored or at anchor by day;

the ship is moored or at anchor at night;

the ship is under way by day; or

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	3-7
	DANGEROUS GOODS HANDLING GUIDE				

the ship is under way at night.

When practicable, a dedicated anchorage or port should be provided for vessels carrying dangerous cargoes requiring the exhibition of such signals. Special restrictions may be applied to:

access to the vessels;
radio and radar transmissions;
transiting the anchorage; and
passing of ships moored or anchored.

Port authorities should give consideration to the separation of ships under way exhibiting the signals. The Regional Port Authority may also impose specific separation distances and regulate the movement of vessels to avoid the passing of such ships in narrow channels or at bends.

Where signals are to be exhibited, they should be:
by day flag “B” of the International Code of Signals; and
by night an all-round fixed red light.

3.23 Communications

The Regional Port Authority should ensure that every ship engaged in the transport of dangerous cargoes can maintain effective communications with the Regional Port Authority. When appropriate and practicable such communications should be carried out by VHF in accordance with the provisions of SOLAS regulation IV/7 and complying with the performance standards set out in IMO Assembly resolution A.609(15) and the requirements of the regulatory authority.

3.24 Areas

3.24.1 Dangerous cargo areas

Dangerous cargo areas should, where possible, be located so that management and/or security personnel may keep them under continuous observation. Otherwise, an alarm system may be provided or the spaces inspected at frequent intervals.

The spaces should enable an adequate segregation of dangerous cargoes in accordance with the legal requirements of the regulatory authority.

Dangerous cargo areas should have separate areas with all necessary facilities appropriate to the hazards emanating from the cargoes to be kept. Where appropriate these facilities should include separate ventilation, drainage, fire resisting walls, ceilings, etc.

Those areas where hazardous materials are handled shall be furnished with necessary equipment and devices to prevent potential harmful effects of such hazardous materials.

The areas where hazardous materials are handled shall be provided with facilities of entrance to and exit from the same to allow for response to emergencies or the access roads to those units carrying loads that contain hazardous materials shall be kept open, if any hazardous materials are stowed or stored on the entire site and the site shall be furnished with systems that are capable of providing emergency facilities for rapid response.

3.24.2 Lorry parking areas

Separate areas may be designated for specific dangerous cargoes.

Segregation requirements of the regulatory authority should be met when designating areas.

Care should be taken that, in case of an emergency, adequate access is provided for handling equipment, emergency services, etc.

Adequate emergency facilities should be provided. These should be appropriate to the hazards of the dangerous cargoes to be handled.

3.24.3 Special areas for damaged dangerous cargoes and wastes contaminated with dangerous cargoes

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	3-8
	DANGEROUS GOODS HANDLING GUIDE				

Special areas for damaged dangerous cargoes and wastes contaminated with dangerous cargoes should be provided, where damaged dangerous cargoes may be kept and repacked or contaminated wastes separated and kept until their disposal.

Such areas should, where appropriate, be covered, have a sealed floor or ground, separate drainage systems with shut-off valves, sumps or basins and means to discharge contaminated water to special facilities in order to safeguard the port area and the environment.

Such areas should be fenced off to prevent the entry of unauthorized persons and should have facilities for watchmen. The facilities should include adequate means of communication.

3.24.4 Repairing/cleaning facilities

Where repair or cleaning facilities for ships or cargo transport units are provided, they should be situated well away from any area where dangerous cargoes are transported or handled. This should not preclude the carrying out of minor voyage repairs on ships at cargo handling ports or cleaning of cargo tanks at tanker terminals.

Cleaning facilities should be designated and constructed to protect the environment when environmentally hazardous substances are used or are otherwise involved, in the cleaning process.

3.25 Reception facilities

Facilities should be provided for the reception and disposal of bilge water, wastes, ballast and slops, contaminated with dangerous cargoes, as appropriate.

3.26 Training

The personnel who are in charge of actions and operations for the loading/unloading of hazardous materials at the onshore facility shall be provided with training on emergencies (fire, explosion, leakage etc.) and response, occupational health and safety, ISPS code security awareness and safety in line with their job descriptions and fields of work.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	4-1
	DANGEROUS GOODS HANDLING GUIDE				

4 CLASSIFICATION OF DANGEROUS GOODS, HANDLING, LOADING / UNLOADING, HANDLING, SEPARATION, STACKING AND STORING

4.1 Classification of Dangerous Goods

Simf 4		
	4.2	Spontaneously Combustible materials

4.2 Dangerous Goods Marking, Labels, Placards.

The IMDG Code recommends a system based on labels and placards designed especially so that all who work close to this type of cargo will be able to recognize, preferably at first sight, the nature of the risks entailed by these substances, whatever their packaging might be.

Labels

The IMDG Code states that all packaging, packages and drums carrying dangerous goods must be labeled. The labels are in the shape of a rhombus in white, orange, blue, green or red, or a combination of these colors. Symbols illustrating the danger of the class are also required. In general, each label is divided into two parts, the bottom half and the top half. The top half is for the symbol of the class of the good(s), and the lower half is for the text, class or division number. The minimum dimensions of labels are 10 cm x 10 cm. Labels must be firmly adhered to and placed on the package so that it can easily be seen. The quality of the labels must be such so they do not deteriorate outdoors and remain unaltered during the complete transport period and at least three months in the sea.

Due to the fact that dangerous goods can pose more than one risk, it is also necessary to use “secondary risk labels”. These labels are the same as the ones showing the primary risk, regarding their color, shape and symbols. Even though the IMDG Code says nothing to this effect, in some countries the class number is only indicated in the primary risk label, and that the secondary risk label does not include the class number. This is an effective way to distinguish between both.

Placards

The IMDG Code determines that all “cargo transport units” containing dangerous goods must be placarded. In this context, cargo transport units are containers, containers for liquids, tank vehicles, vehicles transporting goods by land, railway wagons with water tanks, good tanks destined for intermodal transport. Placards have the same shape, colors and symbols as the labels, but their dimension is 25 x 25 cm. Containers carrying more than 4000 kilograms of dangerous goods, and all tanks for liquids and gases must have the “United Nations number”. The UN number has four digits and is the number assigned by the United Nations to all goods identified and classified as dangerous.

Containers carrying dangerous goods must display at least one placard on each side and one on each end of the unit (this is to say, on its four sides)

Rail wagons must be placarded on at least both sides

Freight containers, semi-trailers and portable tanks must be placarded on all four sides

Road vehicles must display appropriate placards on both sides as well as the rear

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	4-2
	DANGEROUS GOODS HANDLING GUIDE				

Shapes and Colors of Labels and Placards

Class 4.2– Spontaneously Combustible materials

	Label No. 4.2 Symbol: Flame (black) Background: Upper half white, lower half red Number 4 (black): Bottom corner
---	--

Placards for Marine Pollutants

	Packages and cargo transport units containing dangerous substances which are classified by the IMDG Code as “marine pollutants”, must have the markings shown here, which must be durable. They must be placed close to the risk labels or risk placards of the goods. The dimensions of the marine pollutant markings must be a minimum of 10 cm per side for packages and 25 cm per side for cargo transport units.
---	--

4.3 Separation tables on board and shore facility according to the classes of dangerous cargoes.

It is not applied because it is a solid bulk cargo handling.

4.4 Segregation distances and terms of hazardous loads in warehouses.

It is not applied because it is a solid bulk cargo handling.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	5-1
	DANGEROUS GOODS HANDLING GUIDE				

5 HANDBOOK OF DANGEROUS GOODS

Port facilities engaged in dangerous good loading/unloading, handling and temporary storage activities in order to contribute to the safe performance of these activities.

- dangerous load classes,
- packages of dangerous cargoes,
- packaging
- tags
- signs and packing groups,
- separation tables on board and in the port facility according to the classes of dangerous cargoes,
- sorting distances of hazardous loads in warehouse storage,
- segregation terms,
- dangerous cargo documents,
- hazardous loads emergency response action flow diagram,
- emergency contact information,
- locations of emergency equipment and instructions for use, and
- including issues of port facility rules,

A Dangerous Goods Handbook in pocket-sized dimensions is prepared and presented in the appendix. It is distributed to the employees of the facility for use.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	6-1
	 DANGEROUS GOODS HANDLING GUIDE 				

6 PROCEDURES FOR THE OPERATION

6.1 Procedures for the safe docking, mooring, loading/unloading, sheltering or mooring of ships carrying dangerous cargo, day and night.

6.1.1 It is the responsibility of the Regional Port Authority to direct where and when a ship with any dangerous cargo on board can dock, and stay in the port area, taking into account relevant issues such as the nature and quantity of dangerous goods found, the environment, population and weather conditions.

6.1.2 In an emergency, directing a ship with any dangerous cargo on board to be transported in the port area or to be removed from the port area for the safety of the ship and crew can be done with the approval of the ship's captain, the port management and the approval of the Regional Port Authority.

6.1.3 Attach such requirements to any such directions as are appropriate to local circumstances and the quantity and nature of the dangerous cargoes involved.

6.1.4 The port operator ensure that:

6.1.4.1 adequate and safe mooring facilities are provided; and

6.1.4.2 adequate safe access is provided between the ship and the shore.

6.2 Procedure of according to the seasonal conditions additional measures that Loading/Unloading, operation of dangerous cargo should be taken by port facilities

6.2.1 Bulk cargos are not made in open storages where they will react dangerously when raining, in the event of stormy weather or contact with water.

I hereby confirm its compliance as a Dangerous Goods Safety Advisor.

Signature



	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	6-2
	DANGEROUS GOODS HANDLING GUIDE				

6.3 Procedures on keeping any inflammable, combustible and explosive materials away from operations which cause or are likely to cause sparking and abstaining from operating any tools, apparatus or device which cause or are likely to cause sparking in areas where hazardous materials are handled, stowed and stored

6.3.1 Before starting any hot work, on a port, the responsible person of the company to carry out the hot work shall be in possession of a written authorization to carry out such hot work issued by the Regional Port Authority. Such authorization should include details of the specific location of the hot work as well as the safety precautions to be followed.

6.3.2 In addition to the safety precautions required by the Regional Port Authority, before starting any hot work, the responsible person of the company to carry out the hot work together with the responsible person(s) of the ship and/or port, should add any additional safety precautions required by the ship and/or port.

6.3.3 These should include:

6.3.3.1 The examination, and frequency of re-examination of local areas and adjacent areas, including tests, carried out by accredited testing establishments, to ensure the areas are free, and continue to be free, of flammable and/or explosive atmospheres and, where appropriate, are not deficient in oxygen;

6.3.3.2 The removal of dangerous cargoes and other flammable substances and objects away from the working and adjacent areas. This includes scale, sludge, sediment and other possible flammable material;

6.3.3.3 Efficient protection of flammable structural members, e.g. beams, wooden walls, floors, doors, wall and ceiling coverings against accidental ignition; and

6.3.3.4 The sealing of open pipes, pipe lead-throughs, valves, joints, gaps and open parts to prevent the transfer of flames, sparks and hot particles from the working areas to adjacent or other areas.

6.3.4 A duplicate of the hot work authorization and safety precautions should be posted adjacent to the work area as well as at each entrance to the work area. The authorization and safety precautions should be readily visible to, and clearly understood by, all persons engaged in the hot work.

6.3.5 While carrying out hot work it is essential that:

6.3.5.1 Checks are carried out to ensure that conditions have not changed; and

6.3.5.2 At least one suitable fire extinguisher, or other suitable fire-extinguishing equipment is readily available for immediate use at the location of the hot work.

6.3.6 During hot work, on completion and for a sufficient time after completion of such work, an effective fire-watch should be maintained in the area of the hot work as well as adjacent areas where a hazard resulting from the transfer of heat may be created.

6.3.7 In addition, Port Facility Occupational Safety Procedures is followed.

I hereby confirm its compliance as a Dangerous Goods Safety Advisor.

Signature



	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	7-1
	DANGEROUS GOODS HANDLING GUIDE				

7 DOCUMENTATION, CONTROL AND RECORD

7.1 Procedures regarding to all necessary documents, information and certification relating to dangerous substances and their procurement and control by the relevant persons

7.1.1 The following documents related to hazardous substances are kept up to date.

MARPOL 73/78 International Convention for the Prevention of Pollution from Ships, 1973/78 as amended

S O L A S 74 International Convention for the Safety of Life at Sea, 1974 as amended

7.1.2 The Operational Division for Hazardous Materials handled by our Port

- arriving at the port,
- shipped from the port,
- stored at the port, and
- stored at the port on a temporary basis
- develop all records fully and keep the same for submission upon request regarding any hazardous materials
- the records of hazardous materials are limited to the personnel who need to know the same.

7.2 Procedures of keeping a regular and accurate current list of all hazardous substances in the port facility area and other relevant information.

7.2.1 Records of dangerous cargo handled in our port will be kept by the Operations department to include the following information.

- UN Number,
- PSN name (Proper Shipping Name,
- Class (with lower hazards)
- Marine Pollutant or otherwise
- Receiver,
- Shipper,
- Seal number
- Additional Information (ignition temperature, viscosity, etc.)
- Storage location in the Port Area
- Duration of stay in the Port

7.2.2 This information is recorded on computer or in the file layout so that only authorized personnel can access and presented upon request.

I hereby confirm its compliance as a Dangerous Goods Safety Advisor.

Signature



	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	7-2
	 DANGEROUS GOODS HANDLING GUIDE 				

7.3 Procedures regarding to appropriate identification of hazardous substances delivered to the facility, correct use of shipping names of dangerous cargo, certification, packaging, labeling and declaration, inspection on loading and transport of dangerous cargo in the certified and proper package, container or cargo unit in a safety way and reporting of inspection results.

7.3.1 Coordinately with the Operation, Planning checks the accuracy of the following information through the dangerous cargo documents delivered to the Port and organized by the Shipper;

- Number,
- PSN name (Proper Shipping Name,
- Class (with lower hazards)
- Marine Pollutant or otherwise,
- Seal number
- Additional Information (ignition temperature, viscosity, etc.)
- Storage location in the Port Area

7.3.2 This information is controlled by Port Facility employee.

7.4 Procedures related to procurement of safety data sheets (SDS).

7.4.1 According to the Laws of our country as of January 1st, 2014, Dangerous Goods Safety Data Sheet (SDS) with the following information must be present with the dangerous cargo to be transported through all transport modes (by road, rail, air and marine).

- Number,
- PSN name (Proper Shipping Name,) (required for marine transport)
- Class (with lower hazards)
- Packaging Group (Class 3, 9)
- Marine Pollutants or otherwise,
- Tunnel Restriction Code (required for road transport.

7.4.2 It is checked that if this document is available with the Dangerous substance for the all dangerous cargo to be accepted in the port.

7.5 Procedures for records and statistics of dangerous cargo.

7.5.1 Administration, it is required that a report including the information of dangerous cargo handled in our Port Facility will be reported to the Regional Port Authority in by 3-month periods. The report sample issued by the Operation Department are shown below.

7.5.2 Statistical evaluation of records of dangerous cargo handled in our port is carried out by our Trade, operation departments.

7.5.3 Monthly inventory and control reports of dangerous cargo stocked in our Port Area is organized by the operation department and submitted to Administration.

7.5.4 Records and reports are archived by department by 5-year periods

7.6 Information about the Quality Management System.

ISO 9001 quality management system is available.

I hereby confirm its compliance as a Dangerous Goods Safety Advisor.

Signature



	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	8-3
	DANGEROUS GOODS HANDLING GUIDE				

8 EMERGENCY SITUATION, EMERGENCY PREPAREDNESS AND RESPONSE

8.1 Response procedures for hazardous substances that are dangerous for life, property and/or environment and hazardous situations involving hazardous materials

8.1.1 Decision making.

The choice of protective actions for a given situation depends on a number of factors. For some cases, evacuation may be the best option; in others, sheltering in-place may be the best course. Sometimes, the set locations may be used in combination. In any emergency, officials need to quickly give the public instructions. The public will need continuing information and instructions while being evacuated or sheltered in-place.

Proper evaluation of the factors listed below will determine the effectiveness of evacuation or in-place protection (shelter in-place). The importance of these factors can vary with emergency conditions. In specific emergencies, other factors may need to be identified and considered as well. This list indicates what kind of information may be needed to make the initial decision.

The Dangerous Goods

- Degree of health hazard
- Chemical and physical properties
- Amount involved
- Containment/control of release
- Rate of vapor movement

The Population Threatened

- Location
- Number of people
- Time available to evacuate or shelter in-place
- Ability to control evacuation or shelter in-place
- Building types and availability
- Special institutions or populations, e.g., nursing homes, hospitals, prisons

Weather Conditions

- Effect on vapor and cloud movement
- Potential for change
- Effect on evacuation or shelter in-place

8.1.2 Protective Actions and Response

Protective Actions are those steps taken to preserve the health and safety of emergency responders and the public during an incident involving releases of dangerous cargo and Appendix-5 produced according to specified hazardous substances in the feature act according to the Emergency Response Table.

Isolate Hazard Area and Deny Entry means to keep everybody away from the area if they are not directly involved in emergency response operations. Unprotected emergency responders should not be allowed to enter the isolation zone.

8.1.3 Evacuate

Evacuate means to move all people from a threatened area to a safer place. To perform an evacuation, there must be enough time for people to be warned, to get ready, and to leave an area. If there is enough time, evacuation is the best protective action.

Begin evacuating people near by and those outdoors in direct view of the scene. When additional help arrives, expand the area to be evacuated downwind and crosswind to at least the extent recommended in measures specified in the Emergency Response Table referred to in Annex-5. Even after people move to the distances recommended, they may not be completely safe from harm.

They should not be permitted to congregat at such distances. Send evacuees to a definite place, by a specific route, far enough away so they will not have to be moved again if the wind shifts.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	8-4
	 DANGEROUS GOODS HANDLING GUIDE 				

In the case of an emergency, the areas to which the persons are to be assembled in the Terminal are identified and marked as "Emergency Assemble Points".

8.1.4 Shelter In-Place

Shelter In-Place means people should seek shelter inside a building and remain inside until the danger passes. Sheltering in-place is used when evacuating the public would cause greater risk than staying where they are, or when an evacuation cannot be performed. Direct the people inside to close all doors and windows and to shut off all ventilating, heating and cooling systems.

In-place protection (shelter in-place) may not be the best option if

- the vapors are flammable;
- if it will take along time for the gas to clear the area; or
- if buildings cannot be closed tightly.

It is vital to maintain communications with competent persons inside the building so that they are advised about changing conditions. Persons protected-in-place should be warned to stay far from windows because of the danger from glass and projected metal fragments in a fire and/or explosion.

Every dangerous cargo incident is different. Each will have special problems and concerns. Action to protect the public must be selected carefully.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	8-5
	DANGEROUS GOODS HANDLING GUIDE				

8.2 Information on resource, capability and capacity of the port facilities regarding to respond to emergencies.

8.2.1 The facility features an approved fire plan. Firefighting teams are created for each shift. Demonstrations and exercises, either scheduled or unscheduled, are provided for training purposes within the scope of various scenarios at indefinite times. The firefighting equipment stipulated by the approved plan are made available fully and maintenance, inspection and test activities shall be conducted for the same.

8.2.2 The facility has an approved action plan against Environmental and Marine Pollution. For each shift, pollution-fighting teams are created. Demonstrations and exercises shall be provided twice a year within the scope of a scheduled scenario, and the reports and records of the same shall be kept. The equipment relating to Environmental and Marine Pollution shall be stored at the facility with counting and inspections in place. Additionally, the facility have a protocol for materials stored in the area to ensure support in case of circumstances with inadequate means.

8.2.3 The response teams are appointed against the spillage of hazardous materials in line with this guideline and pursuant to IMDG Code.

8.3 Regulations related to the the first aid for accidents involving dangerous substances

The "Medical First Aid Guide (MFAG)" in the IMDG Code appendix and Emergency Plans (EmS) in the IMDG Code appendix are used for emergency situations involving dangerous cargoes.

The procedure for how to use it is contained in Annexure-1.1 to the Contingency Plan.

8.4 Onsite and offsite Notifications required to be made in case of emergency

The procedure for how it will be used is contained in Supp.1 Article 12 of the Emergency Plan.

- a) Time of accident occurrence,
- b) How the accident occurs and its reason, if known,
- c) Place where the accident occurs (onshore facility and/or vessel) and its position and impact area,
- ç) Details of vessels involved in the accident, if any (name, flag, IMO no, owner, operator, cargo and its content, full name of the captain and similar details),
- d) Meteorological conditions,
- e) UN number of hazardous material and description of proper handling (the legislation provided in the description of hazardous materials shall apply) and quantity,
- f) Hazard class and sub-hazard class, if any, of hazardous materials,
- g) Packaging group of hazardous materials,
- ğ) Additional risks posed by hazardous materials, if any, such as marine pollutant,
- h) Marking and labelling details of hazardous materials,
- ı) Properties and number of packing, cargo handling unit and container by which hazardous materials are carried, if any,
- i) Manufacturer, shipper, transporter and recipient of hazardous materials,
- j) Extent of resulting damage/pollution,
- k) Number of casualties, injuries and loss, if any,
- l) Emergency response practices performed at the onshore facility regarding the accident.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	8-6
	 DANGEROUS GOODS HANDLING GUIDE 				

8.5 The procedures for reporting accidents.

Dangerous cargo accidents will definitely be reported to the Regional Port Authority and related institutions. The report form will completely contain the following information about the accident which formed in ANNEX-11.16.

- a) Time of accident occurrence,
- b) How the accident occurs and its reason, if known,
- c) Place where the accident occurs (onshore facility and/or vessel) and its position and impact area,
- ç) Details of vessels involved in the accident, if any (name, flag, IMO no, owner, operator, cargo and its content, full name of the captain and similar details),
- d) Meteorological conditions,
- e) UN number of hazardous material and description of proper handling (the legislation provided in the description of hazardous materials shall apply) and quantity,
- f) Hazard class and sub-hazard class, if any, of hazardous materials,
- g) Packaging group of hazardous materials,
- ğ) Additional risks posed by hazardous materials, if any, such as marine pollutant,
- h) Marking and labelling details of hazardous materials,
- ı) Properties and number of packing, cargo handling unit and container by which hazardous materials are carried, if any,
- i) Manufacturer, shipper, transporter and recipient of hazardous materials,
- j) Extent of resulting damage/pollution,
- k) Number of casualties, injuries and loss, if any,
- l) Emergency response practices performed at the onshore facility regarding the accident.

I hereby confirm its compliance as a Dangerous Goods Safety Advisor.

Signature



	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	8-7
	 DANGEROUS GOODS HANDLING GUIDE 				

8.6 Coordination, support and cooperation method with authorities.

8.6.1 All accidents related to hazardous materials will primarily be coordinated with Regional Port Authority. Aid units of city / County Fire Department, DEMP and adjacent facilities will provide support and cooperation by informing the Regional Port Authority.

8.6.2 In case of any signs of explosion, fire or emergency noticed at an adjacent facility;

- Measures shall be tightened at the facility in the first place,
- Teams shall be caused to get prepared for providing with the adjacent facility with assistance

8.6.3 Assistance and support teams shall be assigned for responding to any event in consideration of the urgency of situation and the severity of hazard, if there is no possibility to request help or time.

8.6.4 Preparations shall be in place for measures such as unloading and reduction of loads and removal of the vessel to anchorage site in case of any interface vessel in consideration of class, quantity and hazard risk of loads available at hazardous cargo site and on site.

8.7 Emergency evacuation plan for the evacuation of the ship and vessels from the port facility in case of emergency

It is as in the "Ship Emergency Evacuation Plan" submitted to the Regional Port Authority.

8.8 Procedures for handling and disposal of the damaged dangerous cargo and wastes contaminated with dangerous cargo.

8.8.1 Waste Collecting and Handling

8.8.1.1 Consequential waste are collected to waste bins taxonomically and handled to be stored properly. Waste occurred as a result of the maintenance process are handled in that scope.

8.8.1.2 Additional waste classes, if available, are provided to be integrated into the current waste classes.

8.8.2 Waste disposal

8.8.2.1 According to the hazardous or non-hazardous properties, the waste collected are isolated from the facility by selling them or using contracted organizations which are in conformity with legal recycling/disposal methods.

8.8.2.2 Opportunities of all contractors and carriers within the body of waste management in terms of appropriate methods of waste handling and/or disposal are examined.

8.8.2.3 In case of any contracting service received for handling, selling and/or disposal of the waste, those contracting companies are observed whether they fulfill their legal liabilities or perform recycling or disposal without damaging the environment.

8.8.2.4 It is an obligation to keep all the records concerning waste disposal.

8.8.3 Contaminated Packages;

8.8.3.1 These wastes are empty barrels. If occurred, should be left to the contaminated package area in the dump site and Environmental Consulting Firm and Environmental Management System Supervisor contact with contracted and licensed company to send those contaminated packages through filling up the MoTAT (Mobile Waste Tracking System) within the time specified in the laws and regulation. Relevant documents of MoTAT and other documents are stored in environment folder.

8.8.3.2 Contaminated Waste; are used gloves, waste cottons and work uniforms. When occurred, should be collected at the waste barrel which is located at the exit of the production-warehouse department and then moved to the waste area. Within the time specified in the laws and regulation, Environmental Consulting Firm and Environmental Management System Supervisor contact with contracted and licensed company to send those contaminated packages through filling up the MoTAT. Relevant documents of MoTAT and other documents are stored in environment folder.

I hereby confirm its compliance as a Dangerous Goods Safety Advisor.

Signature



	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	8-8
	DANGEROUS GOODS HANDLING GUIDE				

8.9 Emergency drills and their records.

8.9.1 Implementation of Practices;

Emergency organization personnel should get various trainings to get ready for their duties with the purpose of providing against emergencies within the facility. If necessary, such trainings must be organized through specialized agencies. In that scope, relevant personnel have received trainings on IMDG CODE regarding Hazardous cargos and have been certified. Practices, which shall be performed in an effort to examine the efficiency of Emergency Plans and be prepared for facts, have to be planned in a way that they will be performed considering the worst scenario likelihood within the facility.

8.9.2 Practice Scenarios;

Planning practices needs two anticipations one of which is a single incident that the port experience and the other is the worst scenario with the combination of these single incidents. In accordance with the scenarios prepared, practices are ensured to be performed in the fastest and most efficient way possible.

8.9.3 Emergency Practices which will be performed within the facility;

8.9.3.1 Have to be indicated within annual training plans.

8.9.3.2 May be planned as local or general responses,

8.9.3.3 Safety, Spillage, etc. may be combined in practice scenarios,

8.9.3.4 Practices can be performed with or without notices.

8.9.3.5 Practices are based upon different emergency scenarios.

8.9.3.6 A practice may be actually performed as it can be negotiated as a desk work or a seminary,

8.9.3.7 Each practice is prepared with scenarios of different hours, days, seasons and incidents.

8.10 Information on fire protection systems.

8.10.1 Emergency and fire equipment is given as follows:

Fire hydrants, Fire extinguishers, Fire cabinets and Fire hoses, On-site fire alarm detectors, Electrical and diesel fire pumps

The fire inventory is as in the Contingency Plan.

8.11 Procedures for approval, inspection, testing, maintenance and availability of the fire protection system.

8.11.1 Fire-Protection Water Tanks and Fire-Protection Water

8.11.1.1 The storeroom should be cleaned up at least once a year by discharging the content in order to prevent possible hazards from moss and mud built up in the bottom and sides in the event of fire. Inlet valves, check valve and filters are maintained during the discharge process of pondages.

8.11.1.2 In case of sudden drawdown on water level, it must be checked for a seep or leakage and repaired if necessary.

8.11.1.3 Following the annual check, if necessary, internal and external cleaning and maintenance should be performed in sealed stores.

8.11.2 Fire-Protection Water Pumps

8.11.2.1 Points to take into consideration regarding operation of pumps and troubleshooting in addition to scheduled maintenance are specified below.

8.11.2.1 Pumps, stuffing boxes, pressure bolts are checked interrelated and it is ensured whether the pump can be turned up manually with ease or not. Water drops from stuffing box during the operation of the pump is typical. In order to prevent such water flow to the ground, the threaded opening under the stuffing box must be connected to the drainage with a tube.

8.11.2.2 Fire-protection water pumps must be operated and recorded at least 1 hour a week.

8.11.2.3 Pump and suction pipe are ensured to be completely full of water. If it is not, water filling plug and bleed valve must be opened and such parts mentioned must be filled up with water until they overflow and when the water stops at the plug level, the plug must be tightened properly.

8.11.2.4 Pump motor will draw excessive current because of the starting current at the early stages of the operation. As a result of the simultaneous operation of all pumps, cutout switches may be tripped or diesel generators may be broken down seriously because of the heavy current. Therefore, limit relays that regulates the transition -from the star located at the shielded switch which drives the pump motors

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	8-9
	DANGEROUS GOODS HANDLING GUIDE				

to triangle- must be arranged according to the number of pumps and the amount of pumps to be operated simultaneously and with respect to different and appropriate time intervals and timely initiation of pumps is provided.

8.11.2.5 After performing aforesaid preliminaries and checks, pumps are operated by pressing the drive switches. During the operation, electric motor voltage and the ampere driven must be checked from time to time. If the ampere driven is high at normal operation, a troubleshooting is needed. There may be a mechanical breakdown or force at the pump or motor. Substandard voltages may be hazardous for motor.

8.11.2.6 Monometers must be checked regularly and one or more pumps must be stopped in case of excess pressure increases.

8.11.2.7 Delivery pipes of pumps must be equipped with valves initially and check valves thereon.

8.11.2.8 If the check valve of the failed pump on the delivery pipe is blocked by materials such as paper, garbage, pieces, moss, mud and interrupts the proper close of the check valve, a part of the water pumped by the other pumps is pumped to the pool while passing through this failed pumps and suction pipes. This failure blocking the water discharge must be fixed in condition of fire occurrence. If a spinning is detected on some of the couplings of failed pumps during the operation of a part of the pumps, it must be interpreted as a sign for the above mentioned failure.

8.11.2.9 It must be ensured that the pump and the engine are at the right direction during the operation. For that reason, return path must be drawn on the coupling and control must be performed accordingly.

8.11.2.10 The bearings of the pump and engine must not be hotter than hands can resist. If the heat is high, it may be resulted from an internal mechanical forcing or coupling maladjustment. In such situations pump must be stopped and the failure must be corrected immediately.

8.11.2.11 For pumps driven by diesel engine, starting the engine must be carried out in line with the instructions.

8.11.2.12 In condition that a deficiency or malfunction is detected as a result of control, it is fixed by the responsables.

8.11.3 Sprinkler System

8.11.3.1 The most important point and maintenance to do about sprinkler installation is preventing sprinkler head to be congested. To supply this; sprinkler should be worked according to standards/legislations and should be sure that it is working. Sufficient sprinkler head should be keep in every facility and in case of failure, it should be replaced with new ones, broken ones should be towed by repairing.

8.11.4 Fire Protection Hydrant Installation

8.11.4.1 Entering rain water into fire-protection hydrant hose closets should be prevented; hoses should be without fracture, solid and constricted enough. At least one of the hoses should be maintained as always connected to fire protection valve.

8.11.4.2 Fire-protection valves should be impermeable and working. Broken nozzles, valves and hoses should be replaced immediately and faults should be repaired and towed. Therefore, sufficient hose, nozzle, fire-protection valve, clamp, sleeve and spare materials belong to those should be kept. Waiting the failure is not allowed with any reason at firefighting equipment.

8.11.4.3 While determined failures were fixing after drills, running fire-protection hoses shouldn't be put into closet with water in it. Facilities should supply proper hose suspension to drain the water off in hoses and to be dry and facilities shouldn't replace before ensuring that hose is quite dry. If sea water was ejaculated by hoses, firstly inside of them should be washed by fresh water and then they should be dried at a windy place.

8.11.4.4 All pipes belong to installation of sprinkler and fire-protection hydrants have to be controlled in general every three months, rusty parts should be painted, decayed parts should be replaced, valves and retched valves should be controlled and failure should be fixed.

8.11.4.5 If any lack or malfunction is determined as a result of all fire-protection hydrants, hoses, and nozzles control it is fixed by related liable.

8.11.5 Portable Extinguishers

8.11.5.1 Sufficient quantity of spare device should always be in facility storages for failure, control and maintenance. Instead of extinguishers those were used for purposes above should be replaced with reserves.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	8-10
	 DANGEROUS GOODS HANDLING GUIDE 				

8.11.5.2 All extinguishers are had visual test monthly and inspected. After control, extinguishers' upper surface is marked. During the control, especially extinguishers with dry powder are turned down and slightly hit the base, so powder in pipe is allowed to move. Otherwise, powder in extinguishers stays at same location for a long time can be hardened by subsiding to base. After the result of control; if any lack or malfunction is determined, it is fixed by related liable.

8.11.5.3 Extinguishers are inspected annually in general by firm according to TS ISO 11602-2 Fire Protection: Portable and wheeled extinguisher standard. Extinguishers are tested by related firm in ten years most intervals, chemical powder is inspected at the end of the 4th year.

8.11.6 Protection against freezing.

8.11.6.1 Protection of Generators

8.11.6.1.1 By outside temperature's decreasing under +4C, water may start to freeze. Therefore, radiator's generators with water-cooled motor should be ensured with antifreeze.

8.11.6.2 Protection fire-protection water pumps.

8.11.6.2.1 Fire-protection water pumps and absorption pipes are always full with water. So ambient temperature shouldn't be under +4 C.

8.11.6.3 Protecting of fire-protection distribution pipes.

8.11.6.3.1 Main pipes and branch pipes are had to be protected against the freezing about hydrant sinks. So, lines are protected against freezing by isolation or being floored underground.

8.12 The measures to be taken in case of failure on fire protection systems.

8.12.1 The facility is a system with established alternative competency which backs up firefighting equipment.

8.12.2 The support of adjacent facilities, Fire departments and AFAD (Disaster and Emergency Management Directorate) shall be sought in cases where the facility's own firefighting equipment is inadequate or out of service.

8.12.3 Other hazardous and combustible materials / vehicles, which are likely to be affected from fire, shall be removed away from the area, if possible.

8.12.4 A necessity may arise to determine under which conditions assistance and support are provided and their scope.

8.12.5 The capabilities of towing boats or marine vehicles featuring marine fire extinguishing system available in the area should be taken into consideration.

8.13 Other risk control equipment.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	9-1
	DANGEROUS GOODS HANDLING GUIDE				

9 SAFETY AND HEALTH AT WORK MEASURES

9.1 Occupational health and safety measures.

Harbor Structure Management is obligated to take all necessary measures to prevent employees to be affected of these substances, if this is not possible; minimizing it and to protect employees from the danger of these substances when working with chemical substances.

9.1.1 Risk assessment

9.1.1.1 Harbor Structure Management is obligated to do a risk assessment in accordance with 29/12/2012 dated, 28512 numbered Occupational Health and Safety Regulation provisions published at official gazette to determine if there is dangerous chemical substance at Harbor Structure and if there is; determining negative effects in terms of employees' health and safety.

9.1.1.2 Following details are specifically considered at risk assessment to be made at studies with chemical substances:

9.1.1.2.1 Danger and harms of chemical substance in terms of health and safety.

9.1.1.2.2 Turkish material safety verse form (SDS) to be provided from sellers, manufacturers or importers.

9.1.1.2.3 Duration, type and level of contagion.

9.1.1.2.4 Quantity, conditions of usage and frequency of usage of chemical substance.

9.1.1.2.5 Vocational exposition limit values and biological limit values given at annexes of this regulation

9.1.1.2.6 . Effect of preventive measures to be taken or taken.

9.1.1.2.7 If available, results of last health surveillance.

9.1.1.2.8 Each of these substances and their interactions with each other at works that was worked in with more than one chemical substances.

9.1.1.3 Harbor Structure Management obtains extra information from supplier or other sources that is necessary for risk assessment. This information also includes special risk assessments involved in current regulations if available intended for users.

9.1.1.4 A new activity includes dangerous chemical substance is only started after taking all types of measures those were specified by doing risk assessment.

9.1.1.5 Measures to be taken at studying when dangerous chemical substances.

9.1.1.5.1 Risks in terms of employees health and safety when studying with dangerous chemical substances are disabled or minimized with following measures:

9.1.1.5.2 Proper regulation and organization of work are done at Harbor Structure.

9.1.1.5.3 Studies with dangerous chemical substances are made with minimum number of employees.

9.1.1.5.4 Substance quantity and exposition period employees will be exposed is allowed to be at minimum level.

9.1.1.5.5 Chemical substance quantity to be used at Harbor Structure is kept at minimum level.

9.1.1.5.6 Work place building and extensions are always kept clean and neat.

9.1.1.5.7 Proper and sufficient conditions are provided for employees' personnel cleaning.

9.1.1.5.8 Necessary regulations are made to store, transport, use and process dangerous chemical substances, waste and residuals properly at Harbor Structure.

9.1.1.5.9 Safe or less dangerous chemical substance is used instead of dangerous substance in terms of employees' health by using substitution method. If substitution method can't be used because of specification of the work, according to risk assessment result and with order of precedence, following measures are taken and risk is reduced:

9.1.1.5.10 Proper process and engineering control systems are chosen by also considering technological developments at studying with dangerous chemical substances involving maintenance and repair works those can be hazardous in terms of employees' health and safety.

9.1.1.5.11 Block protection measures like installing sufficient ventilation system and proper work organization are taken to prevent risk at its source.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	9-2
	DANGEROUS GOODS HANDLING GUIDE				

9.1.1.5.12 In case of taken measures for protecting employees collectively against chemical substances' negative effects are not sufficient, personnel protection methods are adopted with these measures.

9.1.1.6 Sufficient control, supervision and inspection is made to allow taken measures to be active and perpetual.

9.1.1.7 Harbor Structure Management provides analysis and measurements of chemical substances regularly those could be hazardous for employees health. If any changing is realized at conditions those can effect Harbor Structure employees' exposition to chemical substances, these measurements are repeated. Measurement results are assessed by considering vocational exposition limit values specified in this Regulation annexes.

9.1.1.8 Harbor Structure Management also considers specified measurement results. Every situation vocational exposition limit values are crossed, Harbor Structure Management takes protective and preventive measures to fix this as soon as possible.

9.1.1.9 On condition of remaining Regulation Provision about Protecting Employees from Dangers of Explosive Places secret, Harbor Structure Management makes administrative arrangements and takes technical measurements according to following order of precedence in accordance with turnover's specification involving to process, store and transport chemical substances, to prevent interacting chemical substances' touching each other mutually on the purpose of protecting employees from dangers which originate from chemical substances' physical and chemical feature, by basing results of risk assessment and risk avoidance principles:

9.1.1.9.1 For inflammable and explosive substances to reach dangerous concentration and having dangerous quantity of chemically unstable substances are prevented at Harbor Structure. If this is not possible,

9.1.1.9.2 Having inflammable sources those can cause fire or explosion at Harbor Structure. Conditions those can cause harmful effect of chemically unstable substances and mixtures are disabled. If this is also not possible,

9.1.1.9.3 . Required measures are taken to minimize or prevent employees to be affected by chemically unstable substances and mixture's harmful effects in case of fire or explosion originate from inflammable or explosive substances.

9.1.1.10The design, manufacture and supply of work equipment and protective systems provided for the protection of workers are carried out in accordance with the legislation in force in terms of health and safety. The Port Facility Management requires that all equipment and protective systems to be used in explosive atmospheres comply with the provisions of the Regulation on Equipment and Protective Systems Used in Possible Explosive Environments (2014/34/EU) published in the Official Gazette dated 30/06/2016 and numbered 29758.

9.1.1.11Arrangements to reduce effect of explosion pressure are made.

9.1.1.12Facility, machine and equipment are allowed to be always under control.

9.1.1.13Minimum safety distances are complied with placing storage tanks those have liquid oxygen, liquid nitrogen and liquid argon at workplaces.

9.1.2 Emergencies

9.1.2.1 Port Facility Management, matters specified in the Regulation on Emergency Situations at Workplaces published in the Official Gazette dated 18/6/2013 and numbered 28681, and the Regulation on the Amendment of the Regulation on Emergency Situations published in the Official Gazette dated 01/10/2021 and numbered 31615 Without prejudice to the emergency situations that may arise from dangerous chemicals in the port facility, the following issues are taken into account:

9.1.2.1.1 Preventive measures to reduce negative effects of emergencies are taken immediately and employees are informed about the situation. Necessary studies are done to return emergency to normal and only employees assigned at emergencies to do maintenance, repair and compulsory works and teams came to scene from another place are let to get into effected area

9.1.1.1.2 Personal protective equipment and special security equipment is given to the people allowed to enter the affected area and it is being sure that they are using them as long as the emergency

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	9-3
	DANGEROUS GOODS HANDLING GUIDE				

situation goes on. People who do not have personal protective equipment and special security equipment are not allowed to enter the affected area.

9.1.2.1.3 Information about the Dangerous chemicals and emergency situation intervention and evacuation procedures are all ready for use. Workers employed for the cases of emergency at the Port Facility and the establishments active in first aid, emergency medical attention, saving and firefighting outside the workplace should be provided with these information and procedures easily. This information include.

9.1.2.1.3.1 For the workers employed for the cases of emergency at the Port Facility and the establishments active in first aid, emergency medical attention, saving and firefighting outside the work place to be ready beforehand and so they can practice the appropriate attention, the danger resulting from the work done, precautions to take and works to be done,

9.1.2.1.3.2 A special danger or information about the works needed to be done that are likely to happen in an emergency situation,

9.1.3 Workers' education and informing them

9.1.3.1 The Port Facility Management provides the training and informing of the employees and representatives, without prejudice to the issues specified in the Regulation on the Procedures and Principles of Occupational Health and Safety Training of Employees dated 24/05/2018 and numbered 30430. These trainings and briefings include in particular the following:

9.1.3.1.1 Information gained as a result of the risk evaluation.

9.1.3.1.2 Information about the dangerous substances that may occur or taking place at the Port Facility and about the recognition of these substances, health and security risks, occupational diseases, occupational exposure level values and other legal regulations.

9.1.3.1.3 Necessary precautions and things to do so that the worker's do not danger themselves or the other workers.

9.1.3.1.4 Information on the Turkish material safety data sheets supplied from the manufacturer for the dangerous chemical substances.

9.1.3.1.5 Information on labelling/locking the parts, covers, pumping system and suchlike instalment where the dangerous chemical substances are according to the regulations

9.1.3.2 The training and information to the workers and their representatives on the works with the dangerous substances are a training supported by a verbal or written instruction due to the risk degree resulting from the risk evaluation done and its type. These instructions change according to the changing conditions.

9.2 Information about the personal protective clothes and procedures to use them

Personal Protective Devices of the Response Teams

Level A

Usage area : Situations where the skin, breathing, eyes and etc. need to be protected in a high standard – gas proof

Positive pressured Tube Breathing Apparatus– SCBA

Protective clothing against the chemicals

Gloves which are chemical proof from inside.

Gloves which are chemical proof from outside.

Boots or long boots, chemical proof, with steel heels.

Thermal underwear, long sleeve and cuffed

Hard Cover

Long sleeved

Double sided wireless connection (No spreading sparks)

Level B

The minimum level needed for the entry and exit to the scene, rather for the liquids to be spilled or scattered.

Positive pressured Tube Breathing Apparatus– SCBA

Protective clothing against the chemicals

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	9-4
	DANGEROUS GOODS HANDLING GUIDE				

Gloves which are chemical proof from inside.

Gloves which are chemical proof from outside.

Boots or long boots, chemical proof, with steel heels.

Hard Cover

Double sided wireless connection (No spreading sparks)

Face mask

Level C

Used when the chemicals in environment are known, when the concentration is decided, when it is decided that the skin and eyes will not get harmed. However continuous measure should be done.

→ Full mask, air cleaning filter

→ Protective clothing against the chemicals

→ Gloves which are chemical proof from inside.

→ Gloves which are chemical proof from outside.

→ Boots or long boots, chemical proof, with steel heels.

→ Hard Cover

→ Double sided wireless connection (No spreading sparks)

→ Face mask

Level D

Work clothes (emergency intervention team). Requires long sleeved and security shoes/boot. Other Personal protection equipment changes due to the condition of the event. If a problem is to occur about the skin, entries to the scene with these kinds of clothes should not be done. .

9.3 Closed area entry permit measures and procedures.

While the ship is tied to the pier, work that can be done closed area on the ship is not allowed.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	10-1
	DANGEROUS GOODS HANDLING GUIDE				

10 OTHER POINT

10.1 Validity of the Hazardous Substances Compliance Certificate.

Validity of the Port Facility Dangerous Goods Conformity Certificate is 21.12.2025

10.2 Responsibilities of the Dangerous Goods Safety Consultant

The duties and obligations of the Dangerous Goods Safety Advisor (DGSA) responsible for assisting the operation in order to safely carry out the operations related to dangerous substances without causing harm to human health, other living beings and the environment are defined below.

- To monitor compliance with the provisions of the international agreement and contract (ADR / IMDG Code) and relevant legislation in the transport of dangerous cargo.
- To submit recommendations to the enterprise for the transport of dangerous substances according to the provisions of ADR / IMDG Code.
- According to the annual report relating to the carriage of Property of hazardous substances into a format that the Administration determine As of the end of the first to prepare within three months and claimed when www.turkiye.gov.tr address where he served on-site to send to the Administration through DGSA operating and consultancy services provided to enterprises offer.
- Determining the dangerous cargo to be transported and determining the compliance procedures with the requirements in the ADR/IMDG Code regarding this substance.
- Provide guidance on the purchase of transport vehicles which will be used for the transportation of dangerous cargo.
- Identify procedures for the control of equipment used in the carriage, loading and unloading of dangerous substances.
- Ensure that the employees of the enterprise, including national and international legislation and amendments there to, receive appropriate training and records of this training.
- Determine the emergency procedures to be applied in case an incident occurs which will affect an accident or safety during the transportation, loading or unloading of dangerous cargo, to ensure that the exercises are carried out periodically and records are kept.
- Take measures to prevent the occurrence of accidents or serious violations.
- Ensure that the special conditions stipulated by the legislation on the carriage of dangerous substances in the selection and operation of subcontractors or third parties are taken into account.
- In the carriage, filling or unloading of dangerous cargo to ensure that employees have information about operational procedures and instructions.
- Take measures to increase the awareness of the personnel concerned in order to be prepared for the possible risks in the transportation, loading or unloading of dangerous cargo.
- Establish instructions for keeping the documents and safety equipment that must be in the vehicle during the transportation according to the class of the dangerous substance.
- Ensure the implementation of the plan by preparing the operational safety plan specified in ADR Section 1.10.3.2.
- Record all kinds of activities, including training, inspection and control, regarding the activities, by stating the date and time, to keep these records for 5 years and to submit them to the service provided to DGSA Operating and to the consultancy service to be submitted to the Administration if requested.
- In case of a danger in the company in which the consultancy service is in question, to stop the work until the danger is resolved, to start the work with his / her approval in the case that the danger is eliminated, and to work in all stages of the process until the danger is resolved, and notifying the competent authorities in writing.
- In accordance with the ADR / IMDG Code provisions of the load loaded on the transport vehicle; (b) to create procedures for work and operations related to packaging, labeling, marking and loading. DGSA who is responsible for the operation; transport, loading or unloading a boiler that occurs during the damage to the environment, property and environment; collects information on the accident and prepares an accident report for the DGSA Operating and the management of the company. This report was prepared by DGSA, sent out by the company or the Administration to address www.turkiye.gov.tr

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	10-2
	DANGEROUS GOODS HANDLING GUIDE				

DGSA Operating within a month. This report does not replace the report required to be written by the company's management under international or national legislation.

10.3 Matters for carriers of the hazardous substances arriving/leaving port facility by land (matters on required documents that must be available in the road vehicle at the entrance/exit of port or port facility area, equipment and tools required for this vehicles, speed limits in the port area etc.).

Additives (bioethanol and performance additives) arrive by road in the facility part of the terminal.

10.3.1 Necessary certificates

- Dangerous Cargo Declaration, Dangerous Goods Transport freight bill, Multi-Mode Dangerous Cargo Form, Dangerous Cargo Manifest, Packaging and Container/Vehicle Loading Certificate
- Safety Data Sheet,
- Transport document showing exemption for transports within the scope of ADR/RID/IMDG Code 3.4 and 3.5, transport document showing exemption for transports within the scope of ADR 1.1.3.6,
- In transports within the scope of ADR
- Valid and suitable for transportation SRC 5 certificate, ADR written instruction, Vehicle Conformity Certificate suitable for transportation and valid, Transport document

10.3.2 Speed Limit in Port Facility

Speed limit in our port facility is 20 km.

10.4 Matters for carriers of the hazardous substances arriving/leaving port facility by sea (matters on day/night signals to be shown by ships carrying dangerous cargo and vessels, cold and hot work procedures in ships and so on.)

10.4.1 Arrival by Sea

10.4.1.1 Dangerous liquid bulk cargoes are not accepted at the port

10.4.2 Departure by Sea

10.4.2.1 Dangerous liquid bulk cargoes are not accepted at the port

10.5 Accident Prevention Policy

We are aware of that the operations realized in our port have the potential that will lead to accidents inherently. However, we believe all accidents may be prevented. Therefore, we undertake to manage operation ideally to protect subcontractors, visitors, neighbors and environment at the highest level through preventing accidents. With the aim of preventing accidents and mitigate the effects in the direction of Quality Management Systems, we will apply the policies about

- Taking high level security measures for human and environment around Port facility and procuring all resources for this purpose,
- Making the risk evaluation based on quantitative analysis related to ordinary and extraordinary operation and keeping these evaluations updated continuously with the purpose of determining and assessing accidents
- Having performed the arrangements covering maintenance, repair and temporary stopping related to detected risks and preparation of requisite procedures
- Following technological development and providing support required for continuous improving of security measures in facilities with the aim of preventing accidents and mitigate the effects
- making necessary arrangements required for design of new facility, process along with planned changes and having performed risk evaluations absolutely before realization and assessing acceptability
- Determining emergencies that will be detected before with systematic analysis, preparing emergency plans for these emergencies and reviewing with drills following realization of audit regularly

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	10-3
	DANGEROUS GOODS HANDLING GUIDE				

- Tracking performance of system within the framework of procedures to evaluate conformity to the targets identified with Quality Management Systems, in case of failing to provide conformity, searching corrective activities
- Evaluating efficiency and conformity of Quality Management Systems periodically and systematically, documentation, certification, performing review by us as top management and giving support for continuous improvement of Quality Management Systems
- Employing the personnel who have knowledge, education and experience convenient for the positions that will affect safety and security of operational job process within organization,
- Ensuring that our employees in charge develop themselves constantly by means of giving trainings,
- Adhering to national and international law, regulation, bylaws and standards
- Ensuring health and securities of employees, contractors, visitors and neighbors and protection of environment whereby preventing accidents and eliminating the effects systematically through taking necessary measures and searching potential incompatibilities with policy

AS MANAGEMENT AND ALL EMPLOYEES.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	10-4
	DANGEROUS GOODS HANDLING GUIDE				

10.6 Hot Work Procedure

1. No permit is given for the hot works to be done aboard ship. However, in necessary cases, after taking permits in the direction of legal legislations by ship agency, it will be realized under the control of port facility.
2. Before starting to hot works and procedures while dangerous cargo handling and at dangerous cargo areas in our port facility, written permit regarding applicability of hot works in question is taken from Regional Port Authority. With abovementioned permit, the place where hot work and procedures will be performed and related details and additionally safety measures to be applied will be specified on Hot work form.
3. Hot Work Form covers the following.
 - a) With the aim of being sure about that the areas on which work is to be done is no burning and/or explosive environment and insufficient in terms of ventilation and oxygen, auditing frequently the area and adjacent areas where work is to be carried out including the tests applied by accredited testing organizations,
 - b) Removing hazardous cargos and other combustible materials from working area and adjacent areas (lime, sludge, residue and other combustible materials are included in the substances to be removed from the area in question)
 - c) Protecting efficiently against accidental ignition of combustible building materials (i.e., girders, wooden partitions, floors, doors, wall and ceiling coatings)
 - ç) Sealing and ensuring impermeability of open pipes, pipe transitions, valves, joints, gapes and open parts with the purpose of preventing spreading of flame, spark and hot particles from working areas to adjacent areas or other areas
4. Warrant of the hot work to be done and a plate on which the safety measures to be taken are written will be hanged in working area and entrances of all working area. Warrant and safety measures should be visible easily and will be understandable clearly by everyone who will conduct hot works.
5. While doing hot works, attention should be paid to the following matters:
 - a) Controls are carried out with the aim of confirming that no current condition has changed in working environment.
 - b) While hot works are performed, at least one fire tube or other fire extinguishing equipment is made ready, so as to be used instantly with their all apparatus in a venue to be reached easily.
6. In the course of hot work and procedures, when the works in question are completed and during enough time following completion, efficient fire control shall be made in the area on which hot work is conducted and the adjacent areas where hazard will emerge owing to heat transfer.

I hereby confirm its compliance as a Dangerous Goods Safety Advisor.

Signature



	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	10-5
	DANGEROUS GOODS HANDLING GUIDE				

Risk Assessment	
Location of hot work: Area / Location: _____ Special access restrictions (due to the task involving a specific welding type or the location being a hazardous area, confined space, etc): _____	
Reason for hot work: Work activity description: _____ Likely ignition source type(s): ☐ Flame (welding, soldering, brazing, etc) ☐ Spark or slag (grinding, cutting, friction tools, welding, etc) ☐ Hot Object (metal surface, plate, etc) ☐ Other: _____	
Hazard identification, risk analysis and control measure selection:	
Add an additional page if the space below is insufficient.	
Specific Hot Work Issues: (tick appropriate)	☐ The hot work is to be solely undertaken by a contracted party personnel and a detailed work method statement / risk assessment has been previously prepared, reviewed by is attached to this Form. ☐ The hot work is to be solely undertaken by personnel as per the specific hot work issues detailed below.
	Attach documentation & proceed to Section 2 on the following page. Complete the Risk Assessment below.

Risk Assessment Guide																																										
Step 1 – Consider Consequences		Step 2 – Consider Likelihood		Step 3 – Calculate Risk																																						
What are the consequences of this hazard occurring? Consider what is the most probable consequence (below) with respect to this work hazard.		What is the likelihood (below) of the hazard consequence in Step 1 occurring.		1. Take Step 1 rating and select the correct column. 2. Take Step 2 rating and select the correct line. 3. Use the risk score where the two ratings cross on the matrix below. H = High, S = Serious, M = Medium, L = Low																																						
Extreme Multiple fatalities or permanent injuries Critical Single fatality or permanent injury Major Medical treatment or lost time injury Minor First aid treatment Insignificant Incident or near miss – no treatment		Almost Certain Is expected to occur in most circumstances Likely Will probably occur at least once Possible Event might occur at some time Unlikely / Rare Event not expected to occur or only in exceptional circumstances		<table border="1"> <thead> <tr> <th colspan="2" rowspan="2"></th> <th colspan="5">Consequences</th> </tr> <tr> <th>Ins</th> <th>Min</th> <th>Maj</th> <th>Crit</th> <th>Ext</th> </tr> </thead> <tbody> <tr> <th rowspan="4">Likelihood</th> <th>Almost Certain</th> <td>M</td> <td>S</td> <td>H</td> <td>H</td> <td>H</td> </tr> <tr> <th>Likely</th> <td>M</td> <td>M</td> <td>S</td> <td>H</td> <td>H</td> </tr> <tr> <th>Possible</th> <td>L</td> <td>M</td> <td>M</td> <td>S</td> <td>S</td> </tr> <tr> <th>Unlikely / Rare</th> <td>L</td> <td>L</td> <td>M</td> <td>M</td> <td>S</td> </tr> </tbody> </table>				Consequences					Ins	Min	Maj	Crit	Ext	Likelihood	Almost Certain	M	S	H	H	H	Likely	M	M	S	H	H	Possible	L	M	M	S	S	Unlikely / Rare	L	L	M	M	S
		Consequences																																								
		Ins	Min	Maj	Crit	Ext																																				
Likelihood	Almost Certain	M	S	H	H	H																																				
	Likely	M	M	S	H	H																																				
	Possible	L	M	M	S	S																																				
	Unlikely / Rare	L	L	M	M	S																																				
				<table border="1"> <thead> <tr> <th colspan="2" rowspan="2"></th> <th colspan="5">Consequences</th> </tr> <tr> <th>Ins</th> <th>Min</th> <th>Maj</th> <th>Crit</th> <th>Ext</th> </tr> </thead> <tbody> <tr> <th rowspan="4">Likelihood</th> <th>Almost Certain</th> <td>M</td> <td>S</td> <td>H</td> <td>H</td> <td>H</td> </tr> <tr> <th>Likely</th> <td>M</td> <td>M</td> <td>S</td> <td>H</td> <td>H</td> </tr> <tr> <th>Possible</th> <td>L</td> <td>M</td> <td>M</td> <td>S</td> <td>S</td> </tr> <tr> <th>Unlikely / Rare</th> <td>L</td> <td>L</td> <td>M</td> <td>M</td> <td>S</td> </tr> </tbody> </table>				Consequences					Ins	Min	Maj	Crit	Ext	Likelihood	Almost Certain	M	S	H	H	H	Likely	M	M	S	H	H	Possible	L	M	M	S	S	Unlikely / Rare	L	L	M	M	S
		Consequences																																								
		Ins	Min	Maj	Crit	Ext																																				
Likelihood	Almost Certain	M	S	H	H	H																																				
	Likely	M	M	S	H	H																																				
	Possible	L	M	M	S	S																																				
	Unlikely / Rare	L	L	M	M	S																																				

Hazard (List the hazards relating to the work)	Controls (List the controls to manage each of the hazards)	Personal Protective Wears	Responsible Party (List the role, contractor, competency &/or prescribed occupation responsible for implementing the controls)	Risk Assessment (With controls in place: High, Serious, Medium or Low)

Risk Assessment Personnel:			
Risk Assessment Completed by:			
Name:	Employer:	Date:	
Name:	Employer:	Date:	

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	10-6
	DANGEROUS GOODS HANDLING GUIDE				

Section 2 – Hot Work Permit

As per the method of hot work and location described in *Section 1*, identify control requirements in the relevant parts below.

General Hot Work / Ignition Controls

Identify those general hot work and ignition controls required to be undertaken as part of the hot work: (identify as yes or not applicable)	Yes	NA	Control
☐	☐		Fire extinguishers supplied by the workgroup / contractor are to be located immediately adjacent to the hot work area and within 10m (building / fixed location fire extinguishers are not to be relied upon)
☐	☐		Catch mats or boards are to be positioned over grid-mesh, flooring, grates to catch sparks or slag
☐	☐		Combustible and flammable materials or fuel sources are required to be cleared from the area (consider a 15m area around the hot work where practicable and include surfaces below & above the work area)
☐	☐		Drains, cable racks, electrical cables and other heat/fire sensitive items are to be covered (consider a 15m area and use fireproof blankets, catch boards and approved covers as applicable)
☐	☐		A water hose is to be run to the job location and primed ready for use (where appropriate for work locations outdoors and in areas clear of electrical equipment)
☐	☐		A Fire Watcher is required to watch the area during and/or post work to monitor fire risk, sparks, slag, hot objects (consider for work that is arc welding, oxy-cutting or likely to present an ignition hazard post work, and for work in hazardous areas, in confined spaces, outdoors, in windy conditions): ☐ During Work, and/or ☐ Post Work for a time period of _____ minutes

Specific Hot Work / Ignition Controls

	Yes	NA	If Yes, Include Additional Control Details to be Used:
The hot work is to be undertaken on or adjacent to plant that will require an isolation (such as services, pipes, tanks, pressure vessels)	☐	☐	
A fixed fire protection or detection system will need to be taken out of service (approval is required for the impairment and the Fire System Log Book is to be filled in – see also <i>BAC Authorisation</i> below; approval contacts include:	☐	☐	
The work area will require specific cleaning, purging, ventilating or pre-work atmospheric monitoring (due to flammable/explosive vapours, dusts, liquids or solid residues in the work area / location)	☐	☐	
The work area will require pre-work cleaning, stripping, surface preparation, or atmospheric monitoring during works (as a result of surfaces / coatings that may create harmful emissions when heated or cut)	☐	☐	
The nature of the work requires specific respiratory protection to be worn	☐	☐	
The nature of the work requires specific controls to be implemented to protect gas leads or other sensitive plant items involved in the work	☐	☐	
The hot work involves arc-welding whereby specific controls relating to ensuring electrical safety will be required	☐	☐	

Additional Hot Work Controls within Confined Spaces

☐ NA (Not Applicable)

Controls:	Yes	NA
Locate equipment outside the space where practicable (such as gas cylinders, hoses, etc unless involved with respiratory devices)	☐	☐
Extraction fan inlet is to be located as close as practicable to the contamination source	☐	☐
Contaminants are to be expelled from the space (so that they cannot be recirculated and will not harm other workers)	☐	☐
As arc-welding activities are to be suspended for substantial periods, power sources will need to be de-energised, electrodes removed from holders and holders placed so that accidental contact or arcing cannot occur	☐	☐
As gas welding/cutting activities are to be suspended for substantial periods, torch and cylinder valves are to be closed with the torch and hose connections removed from the space and depressurised	☐	☐

Completion Hot Work

☐ NA (Not Applicable)

Controls:	Yes	N/A
After the end of the job is controlled area for at least half an hour.	☐	☐
Field is checked for at least eight hours and one hour intervals.	☐	☐
There is no need to do control after hot working.	☐	☐

Permit Request:

Name: _____ Signature: _____ Date: _____ Time: _____

Approved

Name: _____ Signature: _____ Date: _____ Time: _____

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	10-7
	DANGEROUS GOODS HANDLING GUIDE				

10.7 Responsibilities of Personnel in Operation

10.8.1 Operation Officer

10.8.1.1 Acts according to the checklists in 10.9.

10.8.1.2 A coordination meeting will be held at least 1 day prior to the acceptance of dangerous cargoes to the port facility and the representatives of operation, Field planning, HSE unit, TMGD and other related persons shall participate to the meeting.

10.8.1.3 If a decision is taken at the meeting in favor of accepting the dangerous cargo, management, operation, storage, safety and emergency response departments shall be notified and the necessary preparations and acceptance process will be commenced.

10.8.1.4 If it is required to notify the Port authority, the situation shall be notified to the Port authority in writing by specifying the reasons.

10.8.1.5 Number of equipments and cranes, teams and shifts as well as the port to be used shall be specified at this meeting.

10.8.1.6 Organize the work order with the 2nd Cap.

10.8.1.7 Ensure that the cargo handling is made according to the approved cargo plan With the Planning Specialist

10.8.1.8 Every person engaged in the handling of dangerous cargoes exercises reasonable care to avoid damage to packages, unit loads and cargo transport units.

10.8.1.9 Whilst dangerous cargoes are being handled, precautions are taken to prevent unauthorized access to handling areas.

10.8.1.10 If there is any loss of containment of dangerous cargo, every practical step is taken to minimize risks to persons and adverse effects to the environment.

10.8.1.11 Wrappings and packaging to be used in the activities of changing of cargo transport units, repair thereof or placing of the damaged packages inside the saving packages should be in accordance with the structure of dangerous materials and they shall be produced and certified as they are set out in chapter 6 of the IMDG Code

10.8.1.12 Handling and temporary storage operations to be performed is in accordance with the rules of separation.

10.8.1.13 Fumigated cargo transport units and/or cargo transport units containing poisonous gases shall be stowed in a manner that their covers cannot be opened in an uncontrolled way.

10.8.1.14 Packaged cargoes containing Class 4.3 cargo and bulk cargo shall be prevented from being affected by rain, seawater and other factors.

10.8.1.15 If the evacuation of ship is partially completed, gas measurements will be conducted prior to assignment for the evacuation of cargo in the hold of the ship.

10.8.1.16 During handling of dangerous solid loads ,Canvas is laid between the ship and the port and a responsible person is assigned for cleaning the cargo scattered around.

10.8.1.17 At the areas where solid bulk dangerous cargoes releasing poisonous or flammable gases are handled, periodic controls will be conducted for measuring poisonous or flammable gas concentrations as well as their probable dissemination and the precautions taken will be recorded.

10.8.2 Shift Supervisor

10.8.2.1 Acts according to the checklists in 10.9.

10.8.2.2 The personnel equipped with the necessary protective equipment check before the operation.

10.8.2.3 Necessary warnings will be made in order that the trucks do not to make loading exceeding loading limit and people in charge will pay necessary attention with respect to this issue.

10.8.2.4 The drivers will wait at a specified location away from the vehicle during the loading and unloading of vehicles. It will be controlled if the driver has the necessary protective equipments or not.

10.8.2.5 The shift superintendent will be responsible from controlling the work security, control of equipments, entry and exit of outsiders, safe handling of the cargo, environmental cleaning and duly performance of these works.

10.8.2.6 Organize the work order with the 2nd Cap.

10.8.2.7 Ensure that the cargo handling is made according to the approved cargo plan.

10.8.2.8 Performs the necessary separation according to the classes of dangerous loads.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	10-8
	 DANGEROUS GOODS HANDLING GUIDE 				

10.8.2.9 Every person engaged in the handling of dangerous cargoes exercises reasonable care to avoid damage to packages, unit loads and cargo transport units.

10.8.2.10 Whilst dangerous cargoes are being handled, precautions are taken to prevent unauthorized access to handling areas.

10.8.2.11 If there is any loss of containment of dangerous cargo, every practical step is taken to minimize risks to persons and adverse effects to the environment.

10.8.2.12 Wrappings and packaging to be used in the activities of changing of cargo transport units, repair thereof or placing of the damaged packages inside the saving packages should be in accordance with the structure of dangerous materials and they shall be produced and certified as they are set out in chapter 6 of the IMDG Code

10.8.2.13 Fumigated cargo transport units and/or cargo transport units containing poisonous gases shall be stowed in a manner that their covers cannot be opened in an uncontrolled way.

10.8.2.14 Packaged cargoes containing Class 4.3 cargo and bulk cargo shall be prevented from being affected by rain, seawater and other factors.

10.8.2.15 If the evacuation of ship is partially completed, gas measurements will be conducted prior to assignment for the evacuation of cargo in the hold of the ship.

10.8.2.16 During handling of dangerous solid loads ,Canvas is laid between the ship and the port and a responsible person is assigned for cleaning the cargo scattered around.

10.8.2.17 At the areas where solid bulk dangerous cargoes releasing poisonous or flammable gases are handled, periodic controls will be conducted for measuring poisonous or flammable gas concentrations as well as their probable dissemination and the precautions taken will be recorded.

10.8.2.18 Water balls should be place in vicinity of areas where dangerous materials like coal, which have spontaneous combustion but not affected by water, are stored and watering works should be carried out in a way to avoid combustion. It will be considered if there is a drainage system for collecting the polluted water in the environment when the temporary storage area is announced.

10.8.3 HSE Responsibility

10.8.3.1 Acts according to the checklists in 10.9.

10.8.3.2 The worker at the operation informs about the danger of load and equips it with the necessary protective equipment.

10.8.3.3 Environmental safety is ensured.

10.8.3.4 Ensure that personnel are not duties in the ship's warehouse or on the ground before gas measurements are made.

10.8.3.5 Take necessary fire precautions and control system operation.

10.8.3.6 Controls the presence of the required warning and warning signs.

10.8.3.7 Wrappings and packaging to be used in the activities of changing of cargo transport units, repair thereof or placing of the damaged packages inside the saving packages should be in accordance with the structure of dangerous materials and they shall be produced and certified as they are set out in chapter 6 of the IMDG Code

10.8.3.8 Fumigated cargo transport units and/or cargo transport units containing poisonous gases shall be stowed in a manner that their covers cannot be opened in an uncontrolled way.

10.8.3.9 Packaged cargoes containing Class 4.3 cargo and bulk cargo shall be prevented from being affected by rain, seawater and other factors.

10.8.3.10 If the evacuation of ship is partially completed, gas measurements will be conducted prior to assignment for the evacuation of cargo in the hold of the ship.

10.8.3.11 During handling of dangerous solid loads ,Canvas is laid between the ship and the port and a responsible person is assigned for cleaning the cargo scattered around.

10.8.3.12 At the areas where solid bulk dangerous cargoes releasing poisonous or flammable gases are handled, periodic controls will be conducted for measuring poisonous or flammable gas concentrations as well as their probable dissemination and the precautions taken will be recorded.

10.8.3.13 Water balls should be place in vicinity of areas where dangerous materials like coal, which have spontaneous combustion but not affected by water, are stored and watering works should be carried out in a way to avoid combustion. It will be considered if there is a drainage system for collecting the polluted water in the environment when the temporary storage area is announced.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	10-9
	DANGEROUS GOODS HANDLING GUIDE				

10.8 Safe Handling of Dangerous Goods Operation Procedure Checklist GENERAL

P.NO	Action	SEC	OP. S.	FOR MAN
ACCEPTANCE OF CARGO				
1.	A coordination meeting will be held at least 1 day prior to the acceptance of dangerous cargoes to the port facility	X	X	
2.	The MSDS form about load is provided.		X	
3.	A detailed stowage plan, which identifies by class and sets out the location of all dangerous goods and marine pollutants on board, may be used in place of such a special list or manifest. (IMO FAL form 7)		X	
4.	The Certificate of Conformity for the ship carrying the dangerous cargoes will be checked.		X	
5.	Approved cargo handling / evacuation plan requested		X	
6.	The dangerous cargo (es) to be accepted to the port: 1. Risk arising from dangerous cargo 2. Interaction with dangerous cargoes existing at the port facility, 3. Interaction with cargoes planned to be accepted to the port facility in the near future, 4. Conditions for stowage 5. Conditions for segregation 6. Requirement of materials and equipment with respect to emergency response 7. Sufficiency of emergency response equipments 8. Interaction with the neighboring area (s) The issues mentioned herein above will be discussed within the scope of current IMDG CODE documents and a management decision for accepting/rejecting will be taken.		X	
7.	If a decision is taken at the meeting in favor of accepting the dangerous cargo, management, operation, storage, safety and emergency response departments shall be notified and the necessary preparations and acceptance process will be commenced.		X	
8.	Number of equipments and cranes, teams and shifts and pier shall be specified.		X	
9.	The personnel who will work in the operation will be provided with information as regards the risks of the cargo and they will be equipped with the necessary protective outfit.		X	
10.	Required warnings, warning signs are provided around the area being handled.		X	
P.S. : In standard handled loads, meeting is optional. Previous meeting resolutions may apply.				

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	10-10
	DANGEROUS GOODS HANDLING GUIDE				

Safe Handling of Dangerous Goods in Solid State Operation Procedure Checklist


Dangerous goods in solid state will be loaded/discharged direct delivery in our port facility.

P.NO	Action	SEC	OP. SOR	VAR. AMR
HANDLING				
1.	Necessary warnings will be made in order that the trucks do not to make loading exceeding loading limit. After loading the trucks will surely top off.	X	X	X
2.	The drivers will wait at a specified location away from the vehicle during the loading and unloading of vehicles. It will be controlled if the driver has the necessary protective equipments or not.	X	X	X
3.	Controlling the work safety, control of equipments, entry and exit of outsiders, safe handling of the cargo, environmental cleaning and duly performance of these works.			X
4.	Loading and unloading in accordance with the cargo plan		X	X
5.	If the evacuation of ship is partially completed, gas measurements will be conducted prior to assignment for the evacuation of cargo in the hold of the ship.	X	X	X
6.	Canvas is laid between the ship and the port and a responsible person is assigned for cleaning the cargo scattered around.	X	X	X
7.	Dangerous areas, where handling is done in line with the risks of the dangerous cargo, are determined, regulatory authority's buildings, other facility near the facility, the types of cargo handled at these facilities and features of other cargo which are temporarily stored and handled at the facility, and the fastest and the safest access opportunities as to emergency responses will be taken into consideration.	X	X	X
8.	At the areas where solid bulk dangerous cargoes releasing poisonous or flammable gases are handled, periodic controls will be conducted for measuring poisonous or flammable gas concentrations as well as their probable dissemination and the precautions taken will be recorded	X		
9.	Water balls should be place in vicinity of areas where dangerous materials like coal, which have spontaneous combustion but not affected by water, are stored and watering works should be carried out in a way to avoid combustion. It will be considered if there is a drainage system for collecting the polluted water in the environment when the temporary storage area is announced.	X	X	X
10.	Canvas to be used for avoiding the solid bulk dangerous cargoes from falling to the sea during evacuation or while loading to the ship, will be kept between the ship and the port during the operations.	X	X	X
11.	The master who will load/unload the solid bulk dangerous cargoes will receive the detailed loading or unloading plan which includes details as to the position and quantity of the cargo in the ship from the berth operator prior to the beginning to loading or unloading process. An agreement shall be reached between the master and the berth operator as to the said loading or unloading plan.		X	X

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	11-1
	DANGEROUS GOODS HANDLING GUIDE				

11 ATTACHMENTS

11.1 General Layout Plan of the Port Facility

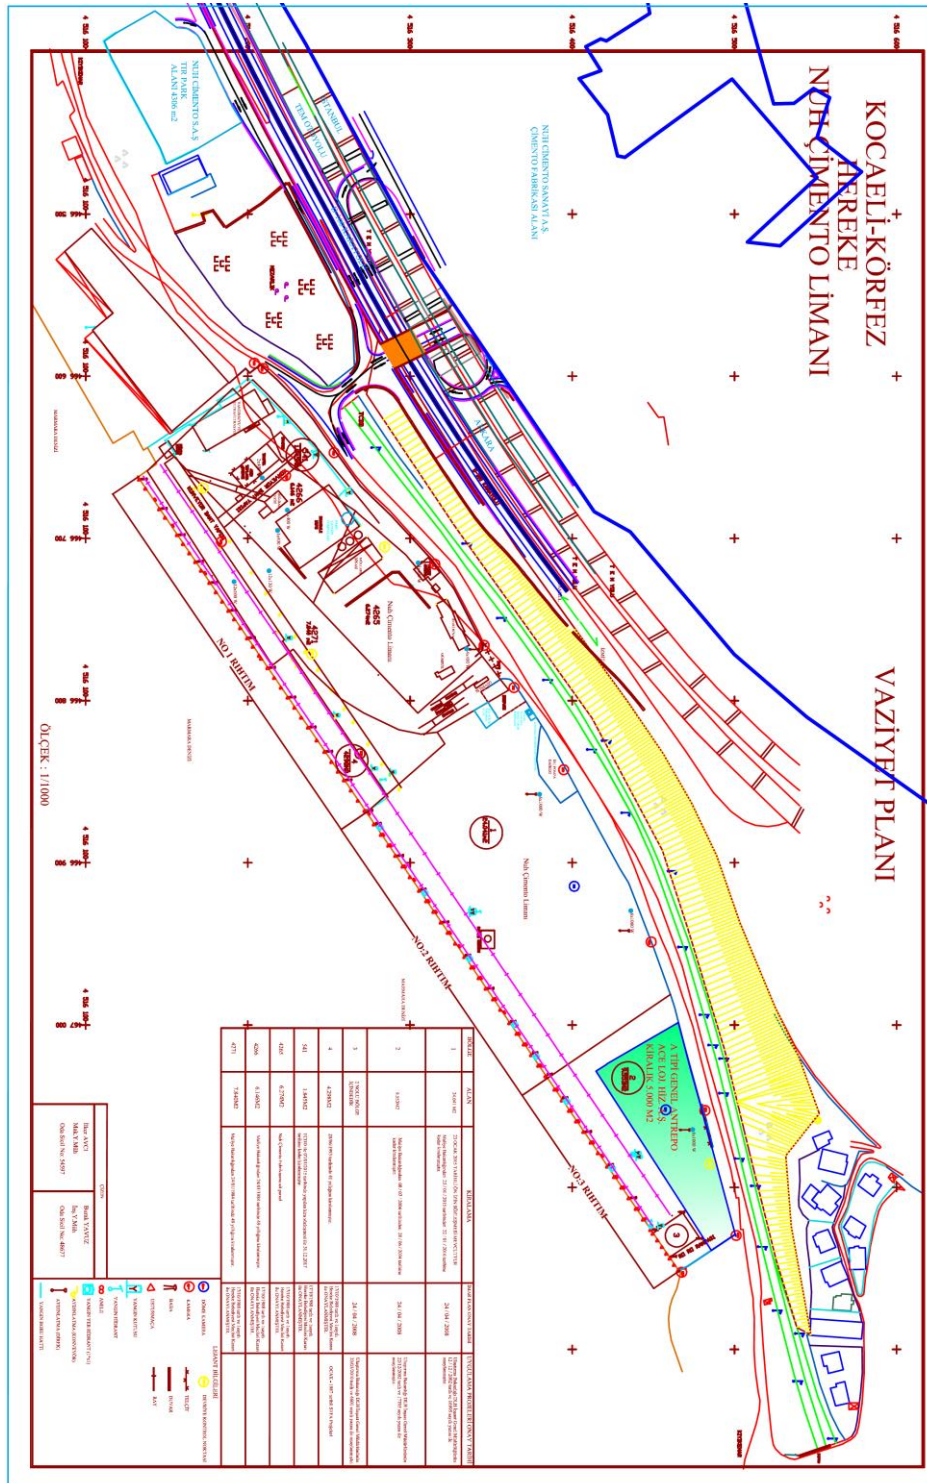

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	11-2
	DANGEROUS GOODS HANDLING GUIDE				

11.2 General View Photographs of the Port Facility



	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	11-3
	DANGEROUS GOODS HANDLING GUIDE				

11.3 Emergency Contact Points and Communication Information

RELEVANT AUTHORITY / ORGANIZATION	<u>TELEPHONE</u>	<u>FAX</u>	<u>E-MAIL</u>
Directorate General of Maritime Affairs	0 (312) 203 10 00	0 (312) 212 46 84	-
Department of Maritime Safety and Security	0 (312) 203 10 00 / 2222 – 2223	0 (312) 231 33 06	-
Department of Ship Registry and Business Affairs	0 (312) 203 10 00 / 3459	0 (312) 231 33 06	isps@denizcilik.gov.tr
Main Search and Rescue Coordination Center (MRCC)	0 (312) 231 91 05-232 47 83	-	trmrcc@denizcilik.gov.tr
Ministry of Interior	0 (312) 425 72 14	-	-
Ministry of Environment	0 (312) 287 99 63	0 (312) 285 51 40	-
Turkish Naval Forces Command	0 (312) 417 62 50	0 (312) 417 30 65	-
Kocaeli Regional Port Authority	0 (262) 528 37 54	-	-
Gendarmerie Station	156 / 0 (262) 515 51 56	-	-
Customs Enforcement Directorate	0 (262) 754 24 03	-	-
Port Health Authority	0 (262) 528 22 08	-	-
Hereke Fire Department	112 / 110 / 0262 511 49 71	-	-
Coast Guard	112/ 158 / 0262 414 35 05	-	-
Hereke Health Center	112 / 0262 511 40 26	-	-
Hereke District Police Department	112/155 / 0262 511 40 70	-	-
Kocaeli Governorship Provincial Directorate of Environment and Urbanization	0 (262) 325 31 85 - 86	0 (262) 325 31 87	kocaeli@csb.gov.tr
Nuh Cement A.Ş.	0 (262) 316 20 00	0 (262) 511 39 86	nuhcimento@nuhcimento.com.tr
Nuh Cement Port Facility	0 (262) 316 20 00	0 (262) 316 25 30	nuhport@nuhcimento.com.tr
Nuh Cement General Manager	0 (262) 316 20 00	-	-
Security Department Volkan BESLER	0 (262) 316 20 41 0 (530) 455 06 90	-	volkan.besler@nuhcimento.com.tr
Port Operations Manager Güner DÜVEN	0 (262) 316 20 98 0 (505) 179 19 79	0 (262) 316 25 30	
Port Operation Specialist Muhammed Cihat GÜNDOĞDU	0 (262) 316 20 00 Dhl:2242	0 (262) 316 25 30	cihat.gundogdu@nuhcimento.com.tr
Liman Operasyon Technician Murat AKKOR	0 (262) 316 20 00 Dhl:2242 0 (530) 781 01 58	0 (262) 316 25 30	murat.akkor @nuhcimento.com.tr
Factory Environmental Engineer Ümit Emre Ün	0 (262) 316 20 00 dhl:2334 0 (554) 642 36 80	0 (262) 316 25 30	Umit.un@nuhcimento.com.tr

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	11-4
	dangerous goods handling guide				

11.4 General Layout Plan of Areas Where Dangerous Goods Are Handled

It is as shown in the general layout plan.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	11-6
	DANGEROUS GOODS HANDLING GUIDE				

11.5 Emergency Plan

The Emergency Plan, which specifies the actions to be taken in case of an emergency, has been prepared within the scope of the Regulation on Workplace Emergency Situations published in the Official Gazette dated 18/6/2013 and numbered 28681, and includes the following items that cover the minimum requirements of this directive.

Emergency procedures:

- a) Emergency procedures and the name, title, and contact details of the person/organization who prepared the procedures.
- b) The organizational chart for emergency response.
- c) The name, title, contact information, duties and responsibilities of the authorized person appointed to coordinate emergency response activities for potential emergencies at the coastal facility, and to establish communication with the Regional Port Authority; or, where there is no Regional Port Authority, the relevant Regional Port Authority and other related institutions and organizations.
- ç) Methods of coordination with external emergency response teams outside the coastal facility during emergencies.
- d) The names and duties of the teams designated for emergency response, as well as the names, duties, and responsibilities of the personnel assigned to these teams.
- e) The nature, capacity, and locations of the resources, equipment, and devices to be used by the coastal facility in emergency response.
- f) Measures and actions to be taken based on the risk assessment conducted to control serious foreseeable conditions that may cause emergencies and to minimize their adverse effects, along with the facility's existing capabilities and capacity in this regard.
- g) The nature and methods of dissemination of the measures and warnings necessary to prevent or minimize potential risks to individuals present at the coastal facility during an emergency, as well as the arrangements regarding what individuals should do in response to such warnings.
- ğ) Notification procedures that must be carried out in compliance with the Instruction on Notification and Special Permission for Dangerous Goods Transported by Sea, published with the Ministerial Approval dated 12/4/2019 and numbered 29486, in case of emergencies.
- h) Training requirements for personnel assigned to emergency duties.
- ı) The nature and frequency of drills to be conducted for emergency situations.

2. A medical first aid guide covering all cargo handled and/or temporarily stored at the facility shall be prepared utilizing the Medical First Aid Guide (MFAG) included in the IMDG Code, in order to ensure that necessary medical first aid can be properly administered to individuals affected by the hazards of dangerous goods and the health issues arising from accidents involving such goods, and shall be appended to the relevant section of the Emergency Plan. General medical advice based on cargo classes shall be provided for packaged dangerous goods.


3. If a new dangerous cargo is to be handled, before the handling operation, a procedure including first aid practices specific to that cargo shall be prepared, added to the relevant section of the Emergency Plan, and the Regional Port Authority shall be notified. During emergency response trainings conducted at the facility, all relevant personnel shall be instructed on how to use the medical first aid guide.

4. The relevant section of the Emergency Plan shall cover each of the following emergency situations:

- a) Facility, equipment, yard, and vessel fires and explosions.
- b) Cargo fires or leakage, spillage, or discharge of dangerous goods belonging to each dangerous goods class and subclass permitted to be handled and/or temporarily stored at the coastal facility.
- c) Marine pollution caused by dangerous goods.
- ç) Gas leakage.
- d) Power outage.
- e) Earthquake and flood.


	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	11-7
	DANGEROUS GOODS HANDLING GUIDE				

11.6 Emergency Assembly Areas Plan

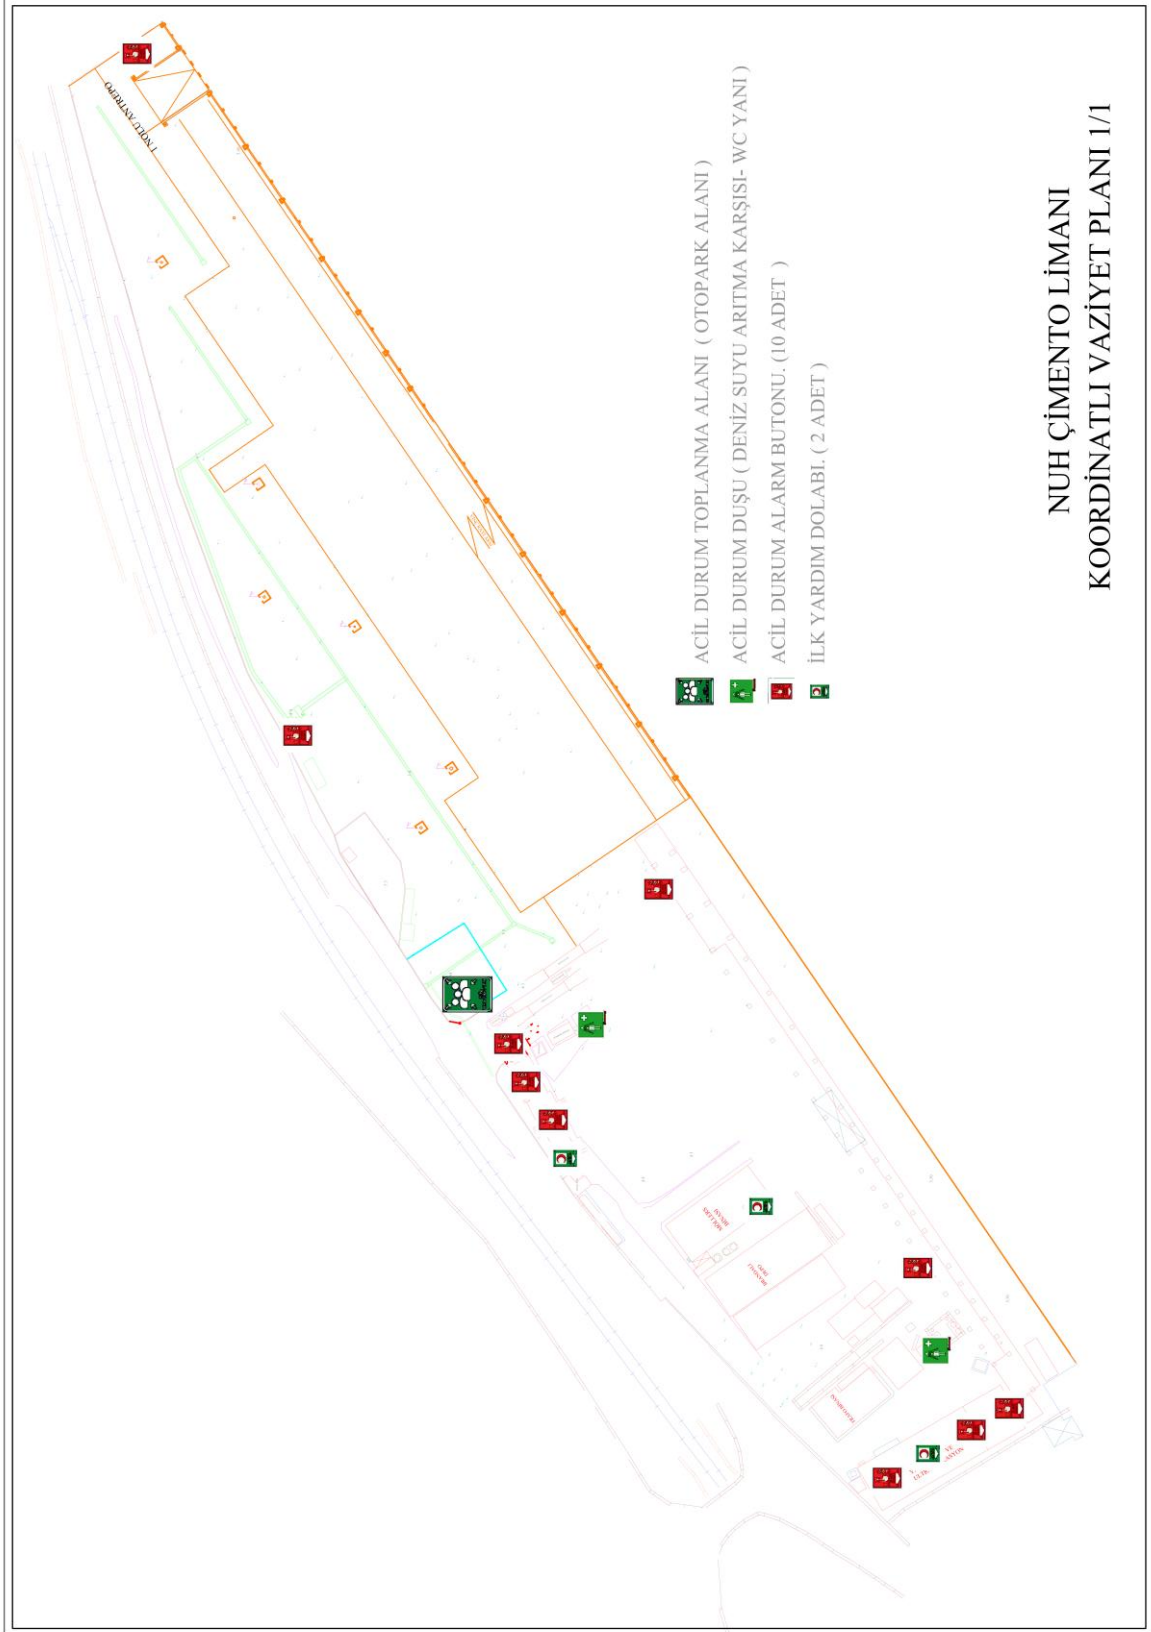

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	11-8
	 DANGEROUS GOODS HANDLING GUIDE 				

11.7 Emergency Management Scheme

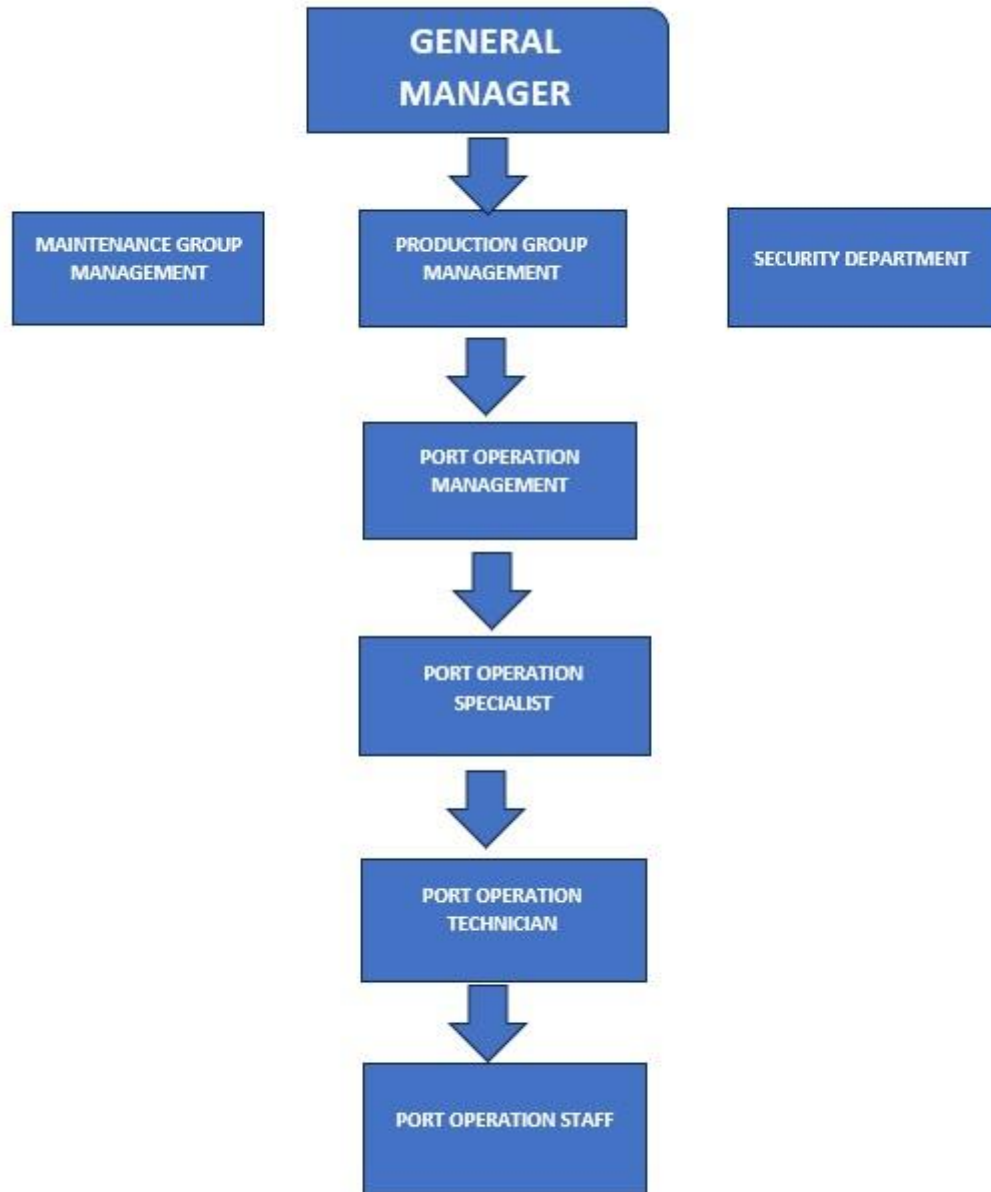

TEHLİKELİ YÜK SINIFLARI			
Explosive 1	Explosive 1.4	Flammable gas 2	Non-flammable non-toxic gas Yanıcı ve zehirli olmayan gaz
Poisonous	Poisonous 6.01	Corrosive acid 8	Corrosive base Spontaneously combustible Kendi kendine yanan sıvı ve katı maddeler
Toxic gas Zehirli gazlar	Toxic gas Zehirli gazlar	Organic peroxide Organik peroksit	Toxic Zehirli maddeler
Emergency when wet Sıvı ve katı gaz ile temas halinde tehlikeli maddeler	Oxidizing agent Oksitleyici maddeler	Oxidizing agent Oksitleyici maddeler	Oxidizing agent Oksitleyici maddeler
Infectious Bulaşıcı maddeler	Infectious Bulaşıcı maddeler	Radioactive I Radyoaktif I	Radioactive II Radyoaktif II
Radioactive Radyoaktif	Radioactive Radyoaktif	Radioactive Radyoaktif	Radioactive III Radyoaktif III
Miscellaneous dangerous diğer tehlikeli maddeler	Miscellaneous dangerous diğer tehlikeli maddeler	Miscellaneous dangerous diğer tehlikeli maddeler	Miscellaneous dangerous diğer tehlikeli maddeler

[illegible]

YÜK TEŞİSİ EDİLEMEDEĞİ DURUMLARDA KULLANINIZ. MALZEME BİLGİ FORMLARINA ULAŞINIZ VE ONA GÖRE HAREKET EDİNİZ.		SAĞLIK SAĞLIK TEŞİSİ EDİLEMEDEĞİ DURUMLARDA KULLANINIZ. MALZEME BİLGİ FORMLARINA ULAŞINIZ VE ONA GÖRE HAREKET EDİNİZ.	SAĞLIK SAĞLIK TEŞİSİ EDİLEMEDEĞİ DURUMLARDA KULLANINIZ. MALZEME BİLGİ FORMLARINA ULAŞINIZ VE ONA GÖRE HAREKET EDİNİZ.
		SAĞLIK SAĞLIK TEŞİSİ EDİLEMEDEĞİ DURUMLARDA KULLANINIZ. MALZEME BİLGİ FORMLARINA ULAŞINIZ VE ONA GÖRE HAREKET EDİNİZ.	SAĞLIK SAĞLIK TEŞİSİ EDİLEMEDEĞİ DURUMLARDA KULLANINIZ. MALZEME BİLGİ FORMLARINA ULAŞINIZ VE ONA GÖRE HAREKET EDİNİZ.

[illegible]

Tehlikeli Yük Belgeleri	Tehlikeli Mal Taşıma Belgesi'nde aşağıdaki bilgiler bulunmalıdır: • Nakliye adı veya doğru teknik isim (ticari isimler kabul edilmeyecektir) • Mümkünse Sınıf ve Bölüm, Sınıf veya Bölüm riski sınıf sayısına dahi edilebilir. Üyümlülük grubu ayrıca sınıf 1 malının içinde belirtilmecektir ve ikinci riski içeren gaz molali durumunda, risklerin belirlenmesi amacıyla daha fazla bilgi eklenecektir • Birleşmiş Milletler numarası UN'den sonra yazılacaktır • Varsa paketlenme grubu • Paket numarası ve tüplerinin yanında hacim veya kütle başına tehlikeli malların toplam miktarı • 61-C veya daha düşük bir parlama noktasına sahip maddeler için parlama noktası • Ek riskler, sevkiyat isminde belirtilmemiştir riskler (Gerekse,de, mallar "Denizi Kirleticisi Madde" olarak belirtilmelidir) • Tehlikeli mal kahtının içeren boş muhafazalara nakliye adından önce veya sonra "Boş", • "Temizlenmemiş" veya "Kaldırı İçerir" gibi durum belirtir yazılar yazılacaktır • Malların doğru sınıflandırıldığı, paketlenildiği, işaretilendiği, etiketlendiği ve nakliyat için uygun olduğunu belirten gönderenin adına imzalanın belge
---------------------------------------	--

[illegible]

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	11-10
	 DANGEROUS GOODS HANDLING GUIDE 				

11.9 Spill Areas and Equipment for CTUs and Packages, Entrance/Exit Drawings
Not Applicable

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	11-11
	 DANGEROUS GOODS HANDLING GUIDE 				

11.10 Inventory of Port Service Vessels

Provided through outsourced services.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	11-12
	DANGEROUS GOODS HANDLING GUIDE				

11.11 Maritime Coordinates of the Regional Port Authority's Administrative Boundaries, Anchorage Areas, and Pilot Boarding/Disembarkation Points

A) Port Administrative Area Boundary

(Amended text: Official Gazette 6/8/2013-28730) The Port Administrative Area of the Kocaeli Port Authority is the maritime and coastal area enclosed by the line formed by the following coordinates.

- 40° 45' 24" K – 029° 21' 15" D (Yelkenkaya Burnu)
- 40° 43' 00" K – 029° 21' 18" D
- 40° 43' 00" K – 029° 23' 24" D
- 40° 44' 57" K – 029° 30' 57" D
- 40° 44' 48" K – 029° 32' 30" D
- 40° 41' 12" K – 029° 33' 36" D

B) Anchorage Areas

a) İzmit Anchorage Area: The anchorage area for vessels not carrying dangerous goods is the maritime area enclosed by the following coordinates.

- 40° 45' 00" K – 029° 52' 48" D
- 40° 44' 00" K – 029° 52' 48" D
- 40° 44' 00" K – 029° 55' 00" D
- 40° 45' 00" K – 029° 55' 00" D

b) Yarımca Anchorage Area: The anchorage area for vessels carrying dangerous goods, nuclear-powered military vessels, and quarantine anchorage is the maritime area enclosed by the following coordinates.

- 40° 46' 24" K – 029° 41' 00" D
- 40° 45' 09" K – 029° 41' 00" D
- 40° 44' 54" K – 029° 43' 00" D
- 40° 46' 18" K – 029° 43' 00" D

c) Hereke Anchorage Area: The anchorage area for vessels not carrying dangerous goods is the maritime area enclosed by the following coordinates.

- 40° 46' 36" K – 029° 38' 09" D
- 40° 45' 24" K – 029° 38' 09" D
- 40° 45' 12" K – 029° 40' 30" D
- 40° 46' 27" K – 029° 40' 30" D

ç) Eskihisar Anchorage Area: The anchorage area for vessels not carrying dangerous goods is the maritime area between the line connecting the following coordinates and the shoreline to the north of this line. Anchorage is not permitted within 2.5 cable lengths from the shore in this area. 1) 40° 45' 12" K – 029° 23' 27" D (Darıca Burnu)

- 40° 46' 00" K – 029° 30' 57" D (Kaba Burnu)

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	11-13
	DANGEROUS GOODS HANDLING GUIDE				

11.13 Emergency response equipment against marine pollution in the port facility

As specified in the Approved Risk Assessment and Emergency Response Plan.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	11-14
	DANGEROUS GOODS HANDLING GUIDE				

11.14 Personal Protective Equipment (PPE) Usage Map

	İŞ ELBİSESİ	İŞ AYAKKABISI	ELDİVEN	BARET	EMNİYET KEMERİ	KULAKLIK	GÖZLÜK	MASKE
TERMİNAL MÜDÜRÜ	x	x		x			x	
İŞLETME ŞEFİ	x	x		x			x	
İŞLETME MÜHENDİSİ	x	x		x			x	
SEVKİYAT BİRİMİ	x	x		x			x	
OPERATÖRLER	x	x	x	x	x	x	x	x
İSG BİRİMİ	x	x		x			x	

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	11-15
	DANGEROUS GOODS HANDLING GUIDE				

11.15 Dangerous Goods Incident Report Form

DATE & Number		
Company		
Sender		CONTACT DETAIL
Action		

Port FACILITY
“DANGEROUS GOODS INCIDENT REPORT”
DATE:

1. Time of the incident

2. How the incident occurred and the cause (if known)

3. Location of the incident (port facility and/or vessel), position and affected area
If a vessel is involved ☐ **Name of vessel**
☐ **Flag**
☐ **IMO number**
☐ **Owner / Operator**
☐ **Cargo type and quantity**
☐ **Master’s name**
☐ **Other relevant details**

4. Meteorological conditions

UN number of the dangerous goods, proper shipping name (in accordance with the applicable dangerous goods legislation) and quantity

- **Dangerous goods class and any subsidiary risk**
- **Packaging group (if applicable)**
- **Additional hazards (e.g., marine pollutant)**
- **Marking and labeling details of the dangerous goods**
- **Packaging, cargo transport unit, or container specifications and identification number (if applicable)**
- **Manufacturer, consignor, carrier, and consignee of the dangerous goods**

6. Extent of the damage and/or pollution caused

7. Number of fatalities and injuries (if any)

8. Description of the response actions taken

9. Organizations from which assistance was requested

10. Other vessels or neighboring facilities that may be affected by the incident

PREPARED BY :

Name & Surname :

Rank :

Signature :

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	11-16
	DANGEROUS GOODS HANDLING GUIDE				

11.16 Notification Form for Inspection Results of Dangerous Goods CTUs

Inspection Results Notification Form for Dangerous Goods Transport Units (CTUs)

The form below contains the CTU inspection results, which are requested by the Administration to be submitted to the Regional Port Authorities on a quarterly basis.

Yıl / Dönem	 /	Sayı	Yüzdelik
Kontrol edilen paketler:			
Kusurlu paketler:			
. toplam			
. yurt içinde doldurulmuş			
. yurt dışında doldurulmuş			
Kusurlar:			
Dokümantasyon:			
. Tehlikeli Yük Deklarasyonu			
. Konteyner/Araç Paketleme Sertifikası			
Plakalama ve markalama			
Konteyner Güvenlik Sözleşmesi onay levhası			
Ciddi yapısal kusurlar			
Kara tankerleri bağlama eklentileri			
Taşınabilir tank veya kara tankerleri (uygunsuz veya hasarlı)			
Etiketleme (paketler için)			
Paketleme (uygunsuz veya hasarlı)			
Yükün segregasyonu			
Paketin içinin istiflenmesi / bağlanması			

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	11-17
	DANGEROUS GOODS HANDLING GUIDE				

11.17 Other Required Attachments

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	11-18
	 DANGEROUS GOODS HANDLING GUIDE				

11.18 Additional Cargo Notification for the Dangerous Goods Handling Guide (When Required)

The notification of cargo not specified in the facility's current Dangerous Goods Handling Guide and planned to be handled at the facility shall be submitted to the relevant Regional Port Authority by completing the form below. The coastal facility must demonstrate that all required equipment, as specified by the applicable code and attached safety data sheet for the cargo, is available at the facility, that all necessary measures—such as first aid, fire safety, security, etc.—have been implemented, and that any required updates have been made in the Dangerous Goods Handling Guide and other relevant procedures.

Appropriate Shipping Name	
UN Number and Class ID / Groups in the Characteristics Table (if applicable)	

Type of Cargo and Applicable Code	Dangerous Liquid Bulk Cargoes (Oil and Oil Derivatives – MARPOL Annex I)	
	Dangerous Liquid Bulk Cargoes (Chemicals and Similar – IBC Code)	
	Dangerous Liquid Bulk Cargoes (Liquefied Gas – IGC Code)	
	Packaged Dangerous Goods (IMDG Code)	
	Dangerous Solid Bulk Cargoes (IMSBC Code)	

Attachment: Safety Data Sheet (SDS)
Dangerous Goods Safety Advisor
Name/Surname/Signature

Port Facility Officer
Name/Surname/Signature

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	12-1
	DANGEROUS GOODS HANDLING GUIDE				

12 ABBREVIATIONS

VHF, Very High Frequency (Marine Band Radio)

CTU, Cargo Transport Unit

IMDG, *International Maritime Dangerous Goods Code*

IMO, *International Maritime Organization*

ILO, *International Labour Organization*

UN, United Nations

PEAR, People, Environment, Assets, Reputation

AFAD, Disaster and Emergency Management Authority (of Türkiye)

SDS, Safety Data Sheet

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	13-1
	 DANGEROUS GOODS HANDLING GUIDE 				

13 DEFINITIONS

Berth/Interface: Means a dock, breakwater, quay, pier, marine terminal, or similar structure (whether floating or fixed) to which a vessel may be moored. This includes any facility or property, other than the vessel itself, used directly or indirectly in the loading or unloading of dangerous cargoes.

Port Facility: Nuh Çimento Sanayi A.Ş. Port Facility

Bulk: Means cargo intended to be carried without intermediate compartments, either in a tank permanently fixed on or in a vessel, or in a cargo space that forms part of the structure of the vessel.

Cargo Companies: Means a consignor (shipper), carrier, forwarder, consolidator, packing center, or any person, company, or organization involved in any of the following activities: identification, storage, packaging, packing, securing, labeling, marking, or documentation of dangerous cargoes, as well as the acceptance of cargoes at the port, their maritime transport, and maintaining control over the cargo at all times.

Certificate of Fitness: Means a document issued by, or on behalf of, the Administration certifying that the structure and equipment of a ship are suitable for carrying dangerous cargoes.

Dangerous Goods:

Petroleum and petroleum products listed in Annex I, Appendix 1 of the International Convention for the Prevention of Pollution from Ships (MARPOL) 73/78;

Packaged substances and articles transported in packages as given in IMDG Code, Chapter 3;

Bulk cargoes listed in IMSBC Code, Appendix 1 whose characteristics table shows the notation “B” or “A and B” in the group column;

Liquid substances listed in IBC Code, Chapter 17 that contain the notation “S” or “S/P” in the “hazards” column (column d) of the table;

Gaseous substances listed in IGC Code, Chapter 19.

The term Dangerous Goods also includes any previously uncleaned packaging (tank-container containment, bulk compartment intermediate containers (IBCs), bulk packaging, portable tanks, or tank vehicles) that contained a dangerous cargo, even if the current contents are not classified as dangerous, or have been partially purged of hazardous gases, provided residues of previous dangerous cargo remain.

Certificate of Compliance: Means a document issued by, or on behalf of, the Administration under SOLAS Regulation II-2/19.4 certifying that the ship’s structure and equipment comply with the regulatory requirements for the carriage of dangerous goods in bulk solid or packaged form.

Handling: Includes the temporary storage of dangerous cargoes at the port as part of the transport supply chain, including the transfer of cargo within the port area from its origin to its intended destination using transport and handling equipment or methods, loading or unloading from a ship, rail wagon, vehicle, freight container, or other transport unit, intermodal transfer between vessels or transport modes, or transfer within a vessel or terminal area. The term is broadly defined to cover a wide range of dangerous goods operations at the port.

Hot Work: Means any work involving open flames, sparks, electrical tools, hot riveting, grinding, welding, burning, cutting, or other heat-generating operations near or in the presence of dangerous goods that could create a hazard.

Master: Means the person in command of a vessel. This does not include pilots.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	13-2
	 DANGEROUS GOODS HANDLING GUIDE 				

Packing:Means the packing, loading, or filling of dangerous goods for delivery to consignees, intermediate bulk containers (IBCs) for bulk transport, freight containers, tank containers, portable tanks, rail wagons, bulk containers, vehicles, barges carried on vessels, or other cargo transport units.

Port Area:Means the land and maritime areas defined by law.

Note:Some port areas may overlap, and legal requirements should account for such overlaps. Care should be taken to ensure all relevant facilities are included under applicable law when defining a port area.

Regional Port Authority: Kocaeli Port Authority

Administration/Administrations: Means a national, regional, or local authority authorized to enforce legal requirements within a port area.

Responsible Person:Means a person, certified or otherwise recognized by the Regulatory Authority, possessing sufficient knowledge and experience to make all decisions related to a specific task, either as a ship master or a person appointed by a shore-side employer.

Ship: Ships falling within the scope of the legislation or the international conventions to which we are a party

Ship's Stores:Means materials carried on board a vessel for the maintenance, upkeep, safety, operation, navigation (excluding fuel and compressed air for main propulsion or fixed auxiliary machinery), or for the safety or comfort of passengers or crew. It includes materials for the normal operation and comfort of passengers and crew, but does not include substances carried for specialized operational functions, e.g., explosives on a deep-sea rescue ship or hazardous substances used by a well-servicing vessel.

Responsible Person:Means a person with up-to-date knowledge, experience, and competence to perform a specific duty.

Stowage:Means the placement of packages, intermediate bulk containers (IBCs), freight containers, tank containers, portable tanks, bulk containers, vehicles, barges carried on a vessel, other cargo transport units, or bulk cargoes on a vessel's deck, holds, sheds, or other spaces.

Transport/Carriage:Means the movement of cargo within port areas using one or more transport modes.

Unstable Substance:Means a substance that, due to its chemical composition, tends to undergo hazardous reactions under polymerization or other temperature conditions or when in contact with a catalyst. This tendency can be mitigated through special transport conditions or by using adequate amounts of chemical inhibitors or stabilizers in the product.

14 PRESENTATION

This Guide applies to the entry and presence of dangerous goods in port areas, both on board vessels and on shore. It is intended to be applicable to all vessels visiting a port, regardless of their flag. It does not apply to ship stores and equipment, nor to military transport or warships.

The purpose of this section is to assist the authorities and organizations responsible for preparing national legal requirements to make these requirements as effective as possible by addressing all potential scenarios involving dangerous goods in cargo areas, without creating applicability for exceptional cases.

	Document Nu.	Release Date	Rev. No	Revision Date	Page Nu.
		20.09.2022	-	22.10.2025	13-3
	 DANGEROUS GOODS HANDLING GUIDE 				

It is important that the definitions are carefully reviewed and used to prevent any misunderstandings.